

# Cairidh

## Hydrographic Data Report: Deployment ID360

22<sup>nd</sup> September to 2<sup>nd</sup> December 2020

November 2021

Mowi Scotland Limited

## CONTENTS

1.	INTRODUCTION .....	5
2.	MATERIALS & METHODS .....	6
	2.1 Bathymetry.....	6
	2.2 Current Data .....	6
	2.3 Magnetic Variation .....	7
	2.4 Data Processing.....	7
	2.5 Meteorological Data .....	10
4.	HYDROGRAPHIC DATA SUMMARY SHEETS .....	11
5.	SUMMARY OF CURRENT DATA – ID360 .....	17
6.	CONCLUSION .....	18
	ANNEX 1. SURVEY EQUIPMENT DEPLOYMENT LOG .....	19

## LIST OF FIGURES

Figure 1. Site location (top) and layout (bottom) and of the salmon farm Cairidh. The current meter deployment location is marked by the black triangle.	5
Figure 2. Bathymetry in the area around the Cairidh site.	6
Figure 3. Mean intensity of the ADCP signal for the ID360 dataset plotted by bin number	9
Figure 4. Current Data Summary Sheet for the surface current cell 25, 27.7m from seabed, 22 <sup>nd</sup> September to 2 <sup>nd</sup> December 2020 inclusive (ID360).	11
Figure 5. Current Data Summary Sheet for the cage bottom current cell 20, 22.7m from seabed, 22 <sup>nd</sup> September to 2 <sup>nd</sup> December 2020 inclusive (ID360).	12
Figure 6. Current Data Summary Sheet for the near bottom current cell 1, 3.7m from seabed, 22 <sup>nd</sup> September to 2 <sup>nd</sup> December 2020 inclusive (ID360).	13
Figure 7. Cumulative Vector Plot of all velocity data from near surface cell for ID360.	14
Figure 8. Cumulative Vector Plot of all velocity data from cage bottom cell for ID360.	15
Figure 9. Cumulative Vector Plot of all velocity data from near bottom cell for ID360.	16
Figure 10. Summary of heading data from deployment ID360.	18
Figure 11. Summary of pitch and roll data from deployment ID360.	18
Figure 12. Pressure data from deployment ID360.	18

## LIST OF TABLES

Table 1: Sentinel V100 ADCP Specifications.	8
Table 2. Summary of current meter deployment	17
Table 3. Ranked percentiles for current speed at all three depths	17
Table 4. Major axis	17
Table 5. Mean and residual currents	17

**QUALITY ASSURANCE**

Mowi Scotland Ltd is ISO9001 and ISO14001 accredited and all project management follows policies designed to ensure that the collection, collation and reporting of information produced in the course of our operations is done to a consistently high standard meeting the requirements of the end user.

# 1. Introduction

Mowi Scotland Ltd. is preparing an application to the Scottish Environmental Protection Agency (SEPA) for a technical variation to CAR/L/1010432 to modify an existing salmon farm site located in Loch Ainort on the Isle of Skye, Cairidh. Mowi Scotland Ltd. propose to change the existing site from 12 x 100 m circumference pens held in a 65 m grid (Figure 1) to 5 x 160 m circumference pens with 12 m deep nets, held in a 100 m grid.

Mowi Scotland Ltd have carried out a hydrographic survey at the Cairidh site between 22<sup>nd</sup> September and 2<sup>nd</sup> December 2020. The purpose of this report is to assess the suitability of the collected hydrographic data for input into a hydrodynamic model of the East Skye and Rassay Sound region.

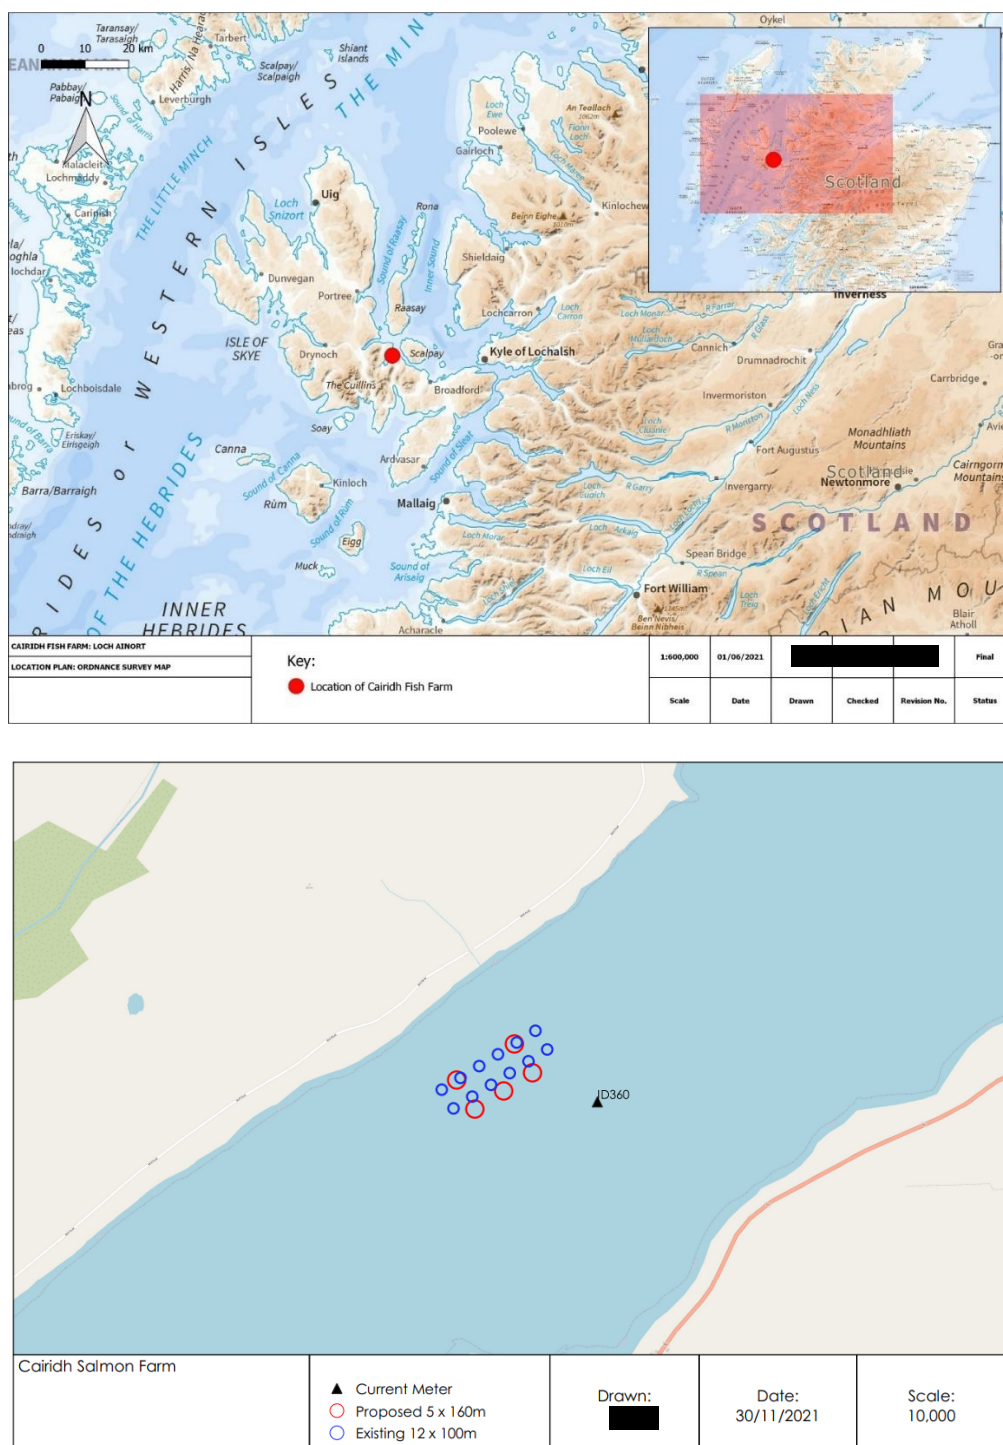


Figure 1. Site location (top) and layout (bottom) and of the salmon farm Cairidh. The current meter deployment location is marked by the black triangle.

## 2. Materials & Methods

### 2.1 Bathymetry

Bathymetry for the study area was taken from the UKHO INSPIRE bathymetry data (<http://aws2.caris.com/ukho/mapViewer/map.action>).

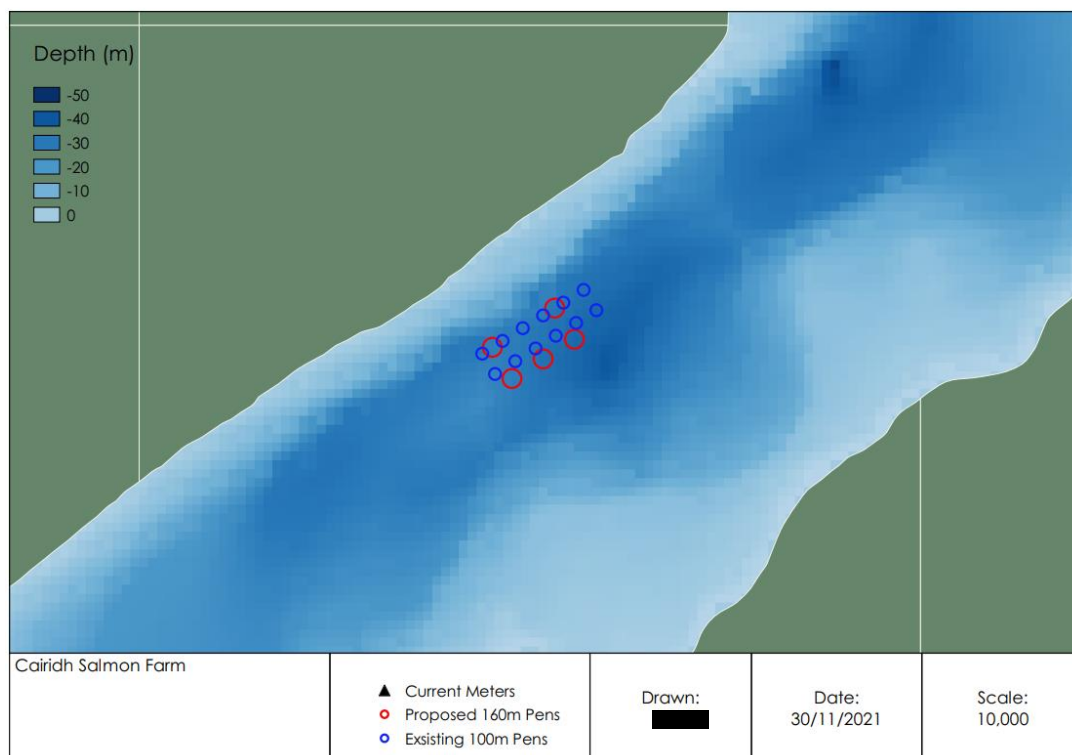


Figure 2. Bathymetry in the area around the Cairidh site.

### 2.2 Current Data

Mowi staff carried out a hydrographic survey at the site in 2020. The purpose of this hydrographic report is to assess the suitability of the collected hydrographic data for use within a Hydrodynamic model. The data contained in this report were recorded at the site from 22<sup>nd</sup> September to 2<sup>nd</sup> December 2020 (70 days and 19 hours of data; deployment ID360).

The Sentinel V100 (Wide) ADCP (Table 1), within its mooring frame, was positioned at 57.28513°N, -6.04417°W (156383E 828855N), which was approximately 540m from the nearest shoreline and approximately 315m from the centre of the proposed cage group (Figure 1). The transducer head was 70 cm from the base of the mooring frame. The mean depth (derived from the pressure sensor) at the Sentinel V100 ADCP position was 35.28 m.

Initial soundings were taken to establish the possible depth the Sentinel V100 ADCP would be situated at during high tide and so that the most appropriate cell size could be determined. The cell size was set at 1.0 m and the number of cells to 49.

Data was automatically written and stored to the internal memory within the Sentinel V100 ADCP main body and then downloaded to computer after completion of the deployment period via WiFi.

### *2.3 Magnetic Variation*

No magnetic variation correction was made to the Sentinel V100 ADCP during deployment, this was undertaken to the data after the instrument was recovered and data downloaded. The magnetic variation used was  $-3.2^{\circ}$ ; this was determined using the World Magnetic Model, produced jointly with the US National Oceanographic and Atmospheric Administration's National Geophysical Data center. Further details can be found at <http://www.geomag.bgs.ac.uk/navigation.html>

### *2.4 Data Processing*

Upon retrieval of the Sentinel V100 ADCP current meter, all data was downloaded to a computer for analysis. The raw data file was opened in Teledyne's "Velocity" software and Matlab. Deployment diagnostic data (beam intensity, correlation, pitch and roll) were analysed to confirm that the deployment was successful with the instrument orientated upright. The heading data were also examined to identify any movement of the Sentinel V100 ADCP mooring frame during the deployment.

The diagnostic data suggested that velocities from the first 25 bins were valid (Figure 3). Calculations were undertaken to identify the cells to be used for surface and middle currents. Surface data was taken at an average depth (derived from the pressure sensor) of 4.39 m (cell 25), and cage-bottom data at 9.39 m (cell 20). Surface and middle cell heights above were 27.72 m and 19.72 m from the seabed respectively. The bottom cell (cell 1) was at a depth of 28.39 m and 3.72 m above the seabed.

Table 1: Sentinel V100 ADCP Specifications.

Depth Cell Size <sup>1</sup>	V20 (1000kHz)		V50 (500kHz)		V100 (300kHz)		
	Depth Cell Size <sup>1</sup>	Range (m) <sup>2,3</sup>	Std Dev (cm/s) <sup>3,4</sup>	Range (m) <sup>2,3</sup>	Std Dev (cm/s) <sup>3,4</sup>	Range (m) <sup>2,3</sup>	Std Dev (cm/s) <sup>3,4</sup>
		Wide/Narrow	Wide/Narrow	Wide/Narrow	Wide/Narrow	Wide/Narrow	Wide/Narrow
	0.25m	18.0/22.6	19.2/36.5				
	0.3m	19.3/24.0	11.1/20.8				
	0.5m	20.2/24.9	7.1/13.4	44.1/57.6	19.2/36.5		
	1.0m	22.1/26.9	3.6/6.7	50.5/64.6	7.1/13.5	94.5/120.6	10.9/20.6
	2.0m	24.5/29.4	1.7/3.2	56.0/70.6	3.6/6.7	103.5/130.4	5.5/10.3
	4.0m	26.9/32.0	0.8/1.6	63.1/78.2	1.7/3.2	114.6/142.3	2.7/5.2
	6.0m			67.4/82.8	1.1/2.1	121.7/151.5	1.8/3.3
Communications and Recording	Wireless Internal memory	802.11b/g/n One 16GB Micro SD Card included					
Profile Parameters	Velocity accuracy  Velocity resolution Velocity range Ping rate	V20/V50: 0.3% of the water velocity relative to the ADCP ±0.3cm/s V100: 0.5% of the water velocity relative to the ADCP ±0.5cm/s 0.1cm/s ±5m/s (default); ±20m/s (maximum) Up to 4Hz					
Echo Intensity Profile	Vertical resolution Dynamic range Precision	Depth cell size 80dB ±1.5dB					
Transducer and Hardware	Beam angle Configuration Depth rating Materials	25° 4-beam, convex; 5th beam vertical 200m Transducer, housing, and end cap: plastic Connector: metal shell					
Standard Sensors	Temperature (mounted on transducer) Compass (magneto-inductive sensor) Tilt (MEMS accelerometers)  Pressure sensor (mounted on transducer)	Range -5° to 45°C, precision ±0.4°C, resolution 0.1° Accuracy 2° RMS, resolution 0.1°, max. dip angle 85° Pitch range ±90°, roll range ±180°, accuracy 2° RMS, precision 0.05° RMS, resolution 0.1° Range 300m, accuracy 0.1%FS					
Power	External DC input Internal battery voltage Battery capacity; over-the-counter @0°C Battery pack @5°C	12–20VDC 18VDC new 100 watt hours (typical) 510 watt hours					
Software	Teledyne RDI's new software included	ReadyW—Pre-deployment (testing, planning, and data recovery) <sup>5</sup> Velocity—Post-processing (data handling, display, and export) <sup>6</sup>					
Environmental	Standard depth rating Operating temperature Storage temperature (without batteries) Weight in air Weight in water	200m -5° to 45°C -30° to 60°C 7.5kg – 16.0kg 1.6kg – 6.0kg					
Available Options	External battery case • AC/DC power converter • 5th beam (at time of order only) • Waves processing • Straight or right-angle metal shell connector						
Dimensions	Special configuration drawing available upon request						

<sup>1</sup> User's choice of depth cell not limited to the typical values specified.

<sup>2</sup> Ranges specified are typical at temperature of 5°C and salinity of 35psu; longer ranges are possible.

<sup>3</sup> User selects the bandwidth mode; wide = 25% or narrow = 6%.

<sup>4</sup> Standard deviations (Std Dev) are typical values for single ping data.

<sup>5</sup> Resident in ADCP accessed via a web browser.

<sup>6</sup> Windows<sup>®</sup> based software program.

Specifications subject to change without notice



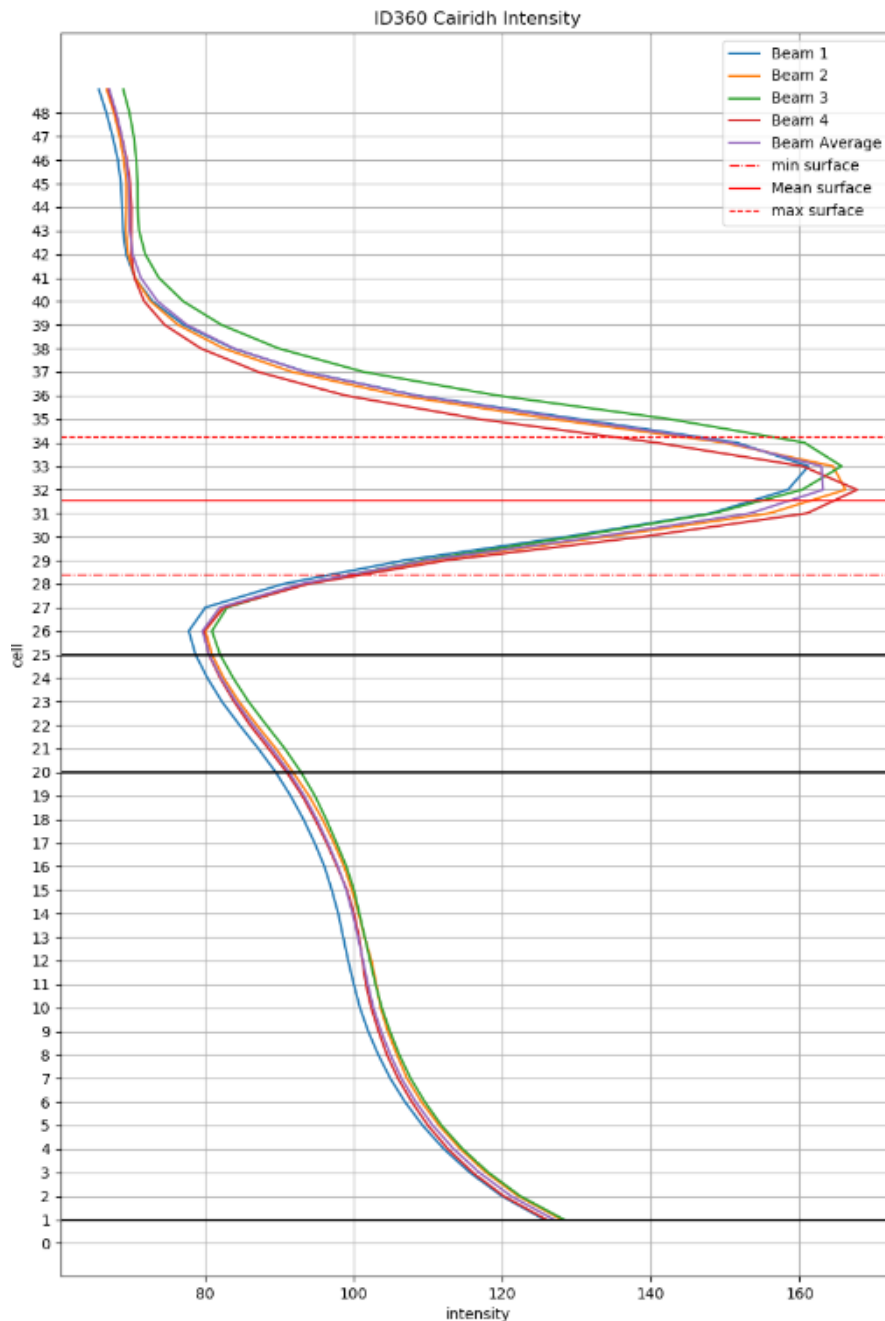


Figure 3. Mean intensity of the ADCP signal for the ID360 dataset plotted by bin number

The 'first cell range' is automatically calculated by the instrument, which is the distance from the transducer head to the first cell. For this deployment, the first cell range was calculated as 3.02 m. This value is then added to the height of the instrument frame (0.7 m) to get the first cell height above the seabed, which equated to 3.72 m

Standard deviation has been assessed throughout the deployment to identify accurate and reliable data for near bed, middle (net depth) and surface cells using the following equation:

$$Cell\ StdDev = \frac{Instrument\ StdDev}{\sqrt{No.\ valid\ pings}} \quad (1)$$

The Instrument Standard Deviation (StdDev) in Equation 1 is determined using the deployment settings when the meter is programmed, examples of the StdDev values for different configurations are shown in Table 1. This deployment had a cell size of 1m which equates to an Instrument StdDev of 10.9 cm/s.

The Percentage of valid pings used to calculate Cell StdDev is derived using “Percentage Good” data which allows us to relate the StdDev to the actual data gathered. The percent good data is available for 1, 2, 3 and 4 beams which represent the following:

- Percent good 1 = % of good data computed from 3 Beams
- Percent good 2 = % of bad data due to more than 2 Beam bad
- Percent good 3 = % of bad data due to error velocity exceeded
- Percent good 4 = % of good data computed from 4 Beams

The method described has been used to calculate the Standard deviation throughout the deployment for the surface, middle and bottom cells; the average StdDev values for the surface middle and bottom was 0.63cm/s, 0.63cm/s and 0.63cm/s respectively which are all within the SEPA criteria of 2cm/s.

### *2.5 Meteorological Data*


The collection of meteorological data is no longer required to support the assessment process and consequently has not been undertaken. The current data used is collected over a longer period and thus provides a more realistic representation of site conditions than short deployments, thus allowing an assessment of the influence of meteorological conditions.

## **3. Results and Discussion**

A summary of the current data is shown in Figure 4 to Figure 12 and in Table 2 to Table 5. Over the period analysed for this report, the near-surface, middle and bottom cells had current speed averages of 4.48 cm/s, 3.71 cm/s and 3.56 cm/s respectively. This gave an overall average of 3.92 cm/s. The orientation of the tidal velocities was northeast-southwest.

The residual current at the surface was toward the north-east (075°G), mid-depth were toward the south-east (107°G) and near the seabed, the residual flows during the deployment period were to the south-west (199°G). The magnitude of the residual currents for the surface, middle and bottom cells were moderate, with mean values of 0.022 m/s, 0.013 m/s and 0.018 m/s respectively.

4. Hydrographic Data Summary Sheets

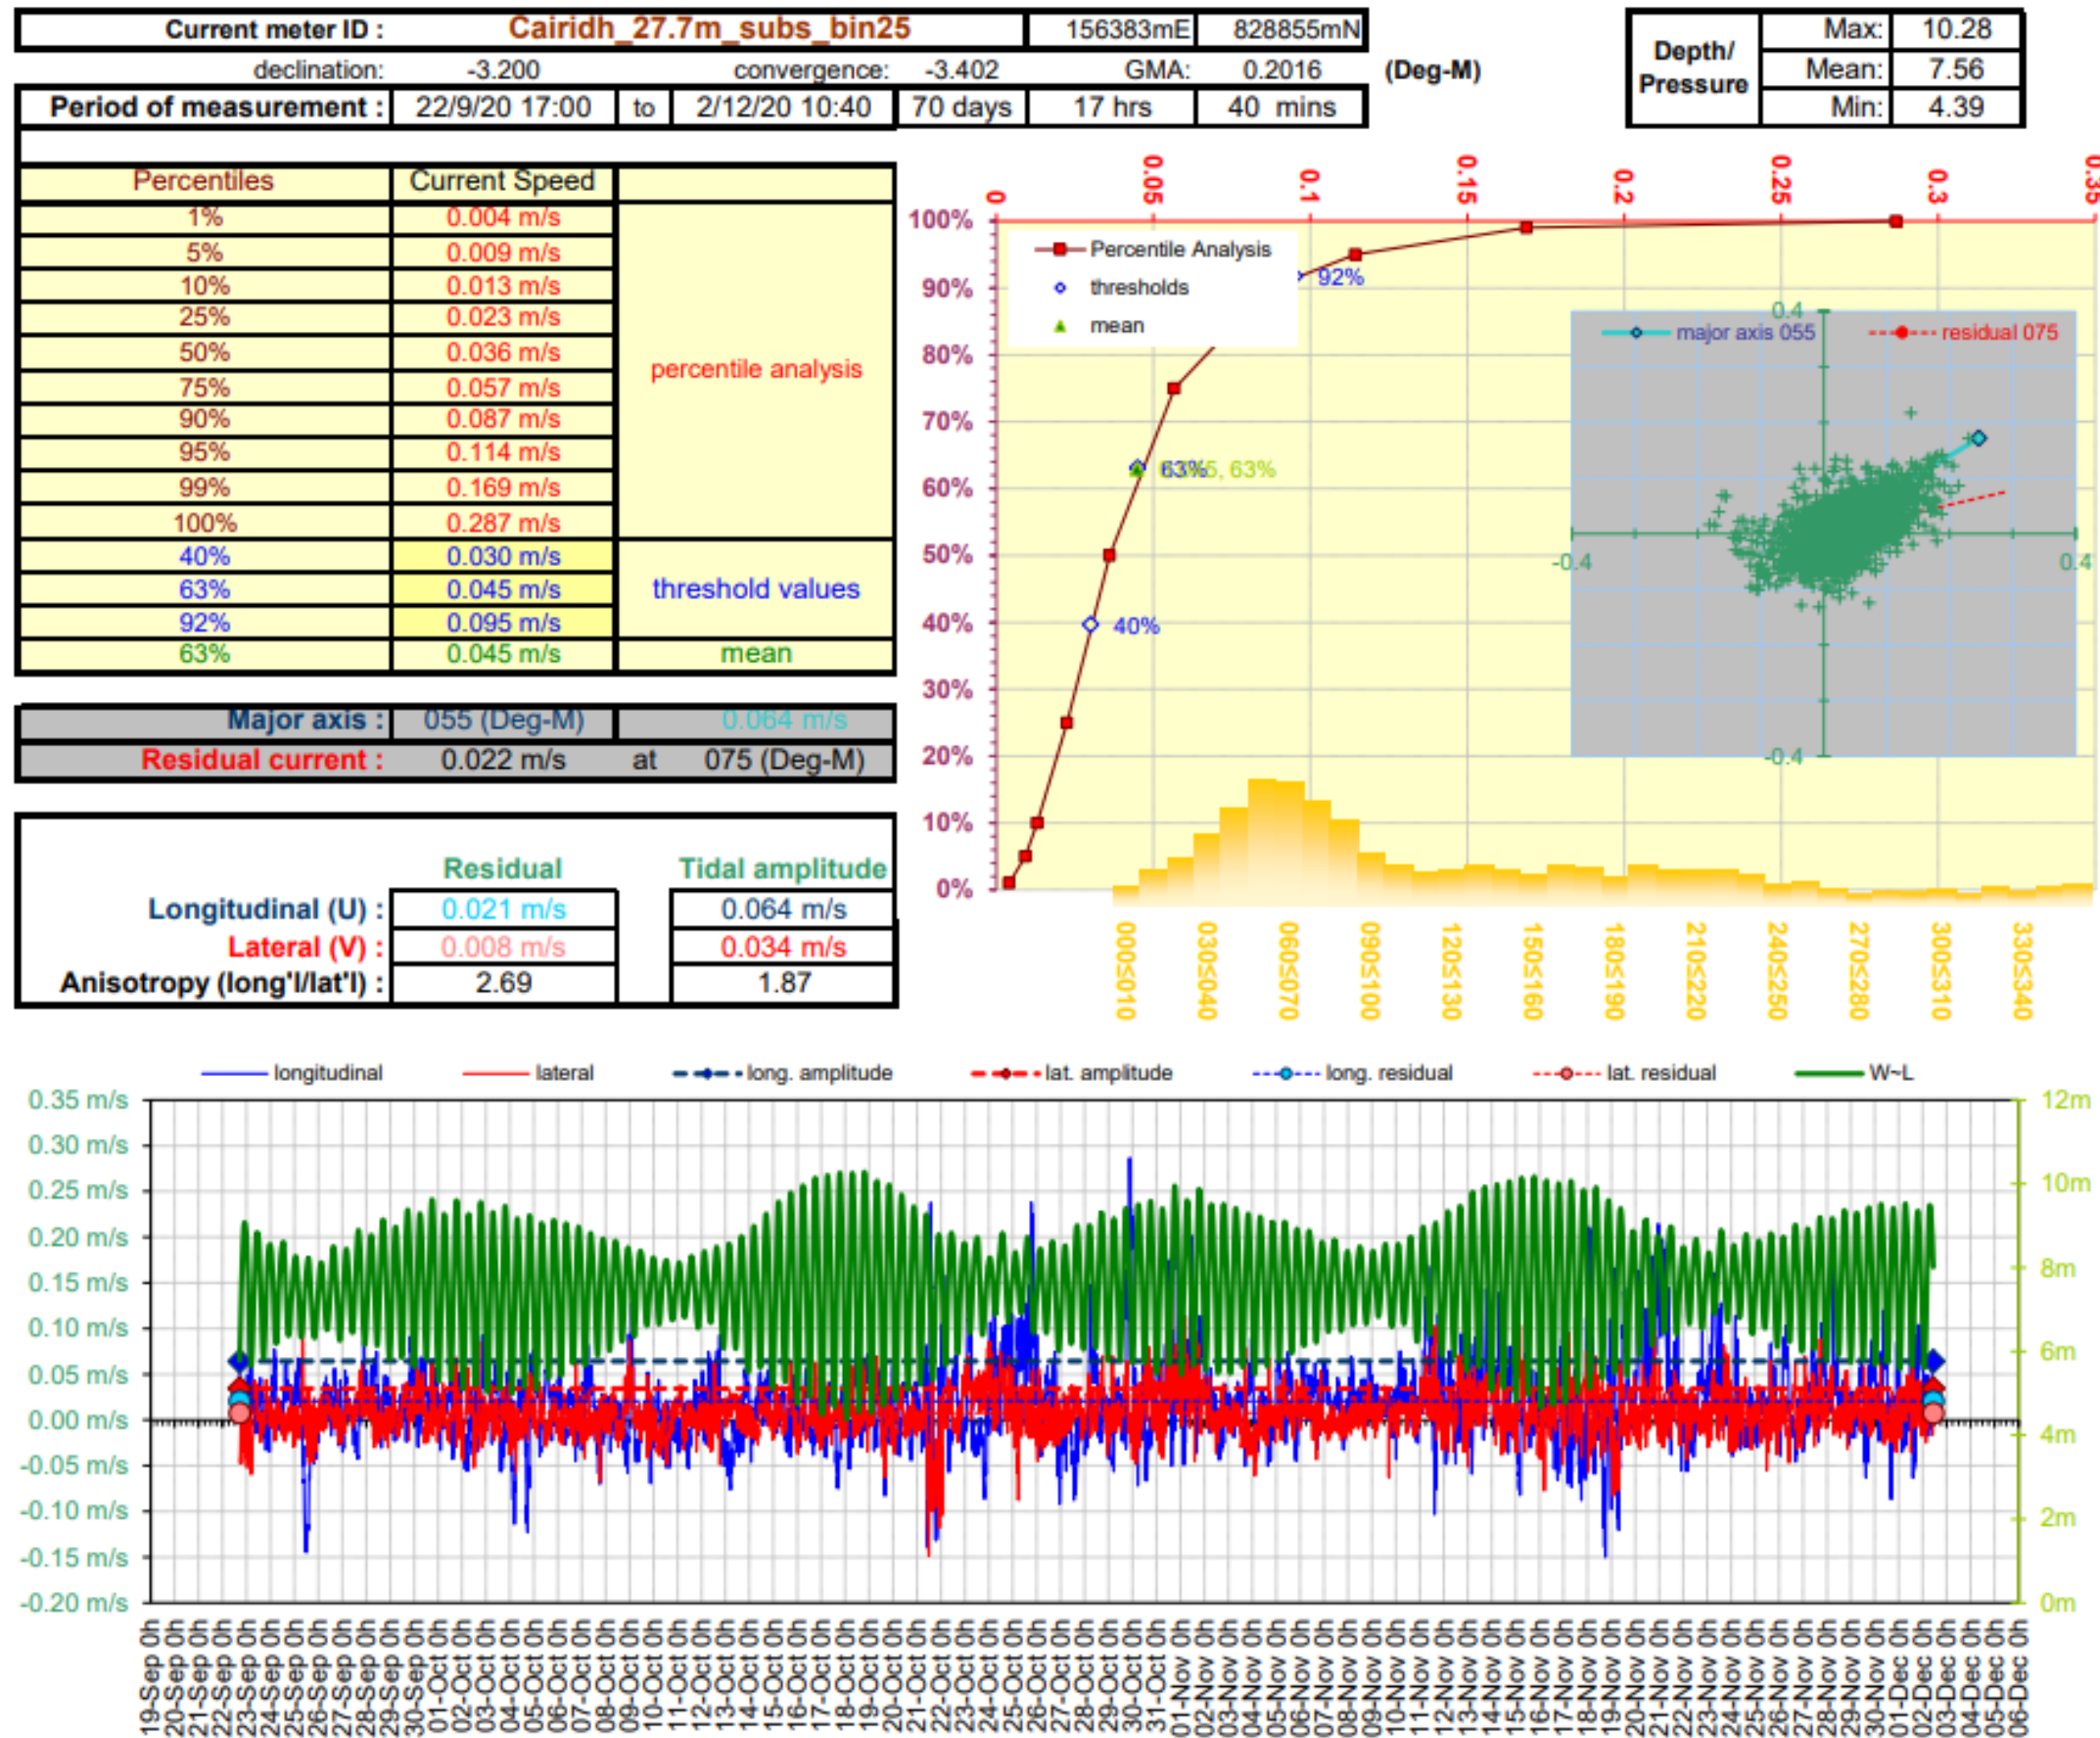



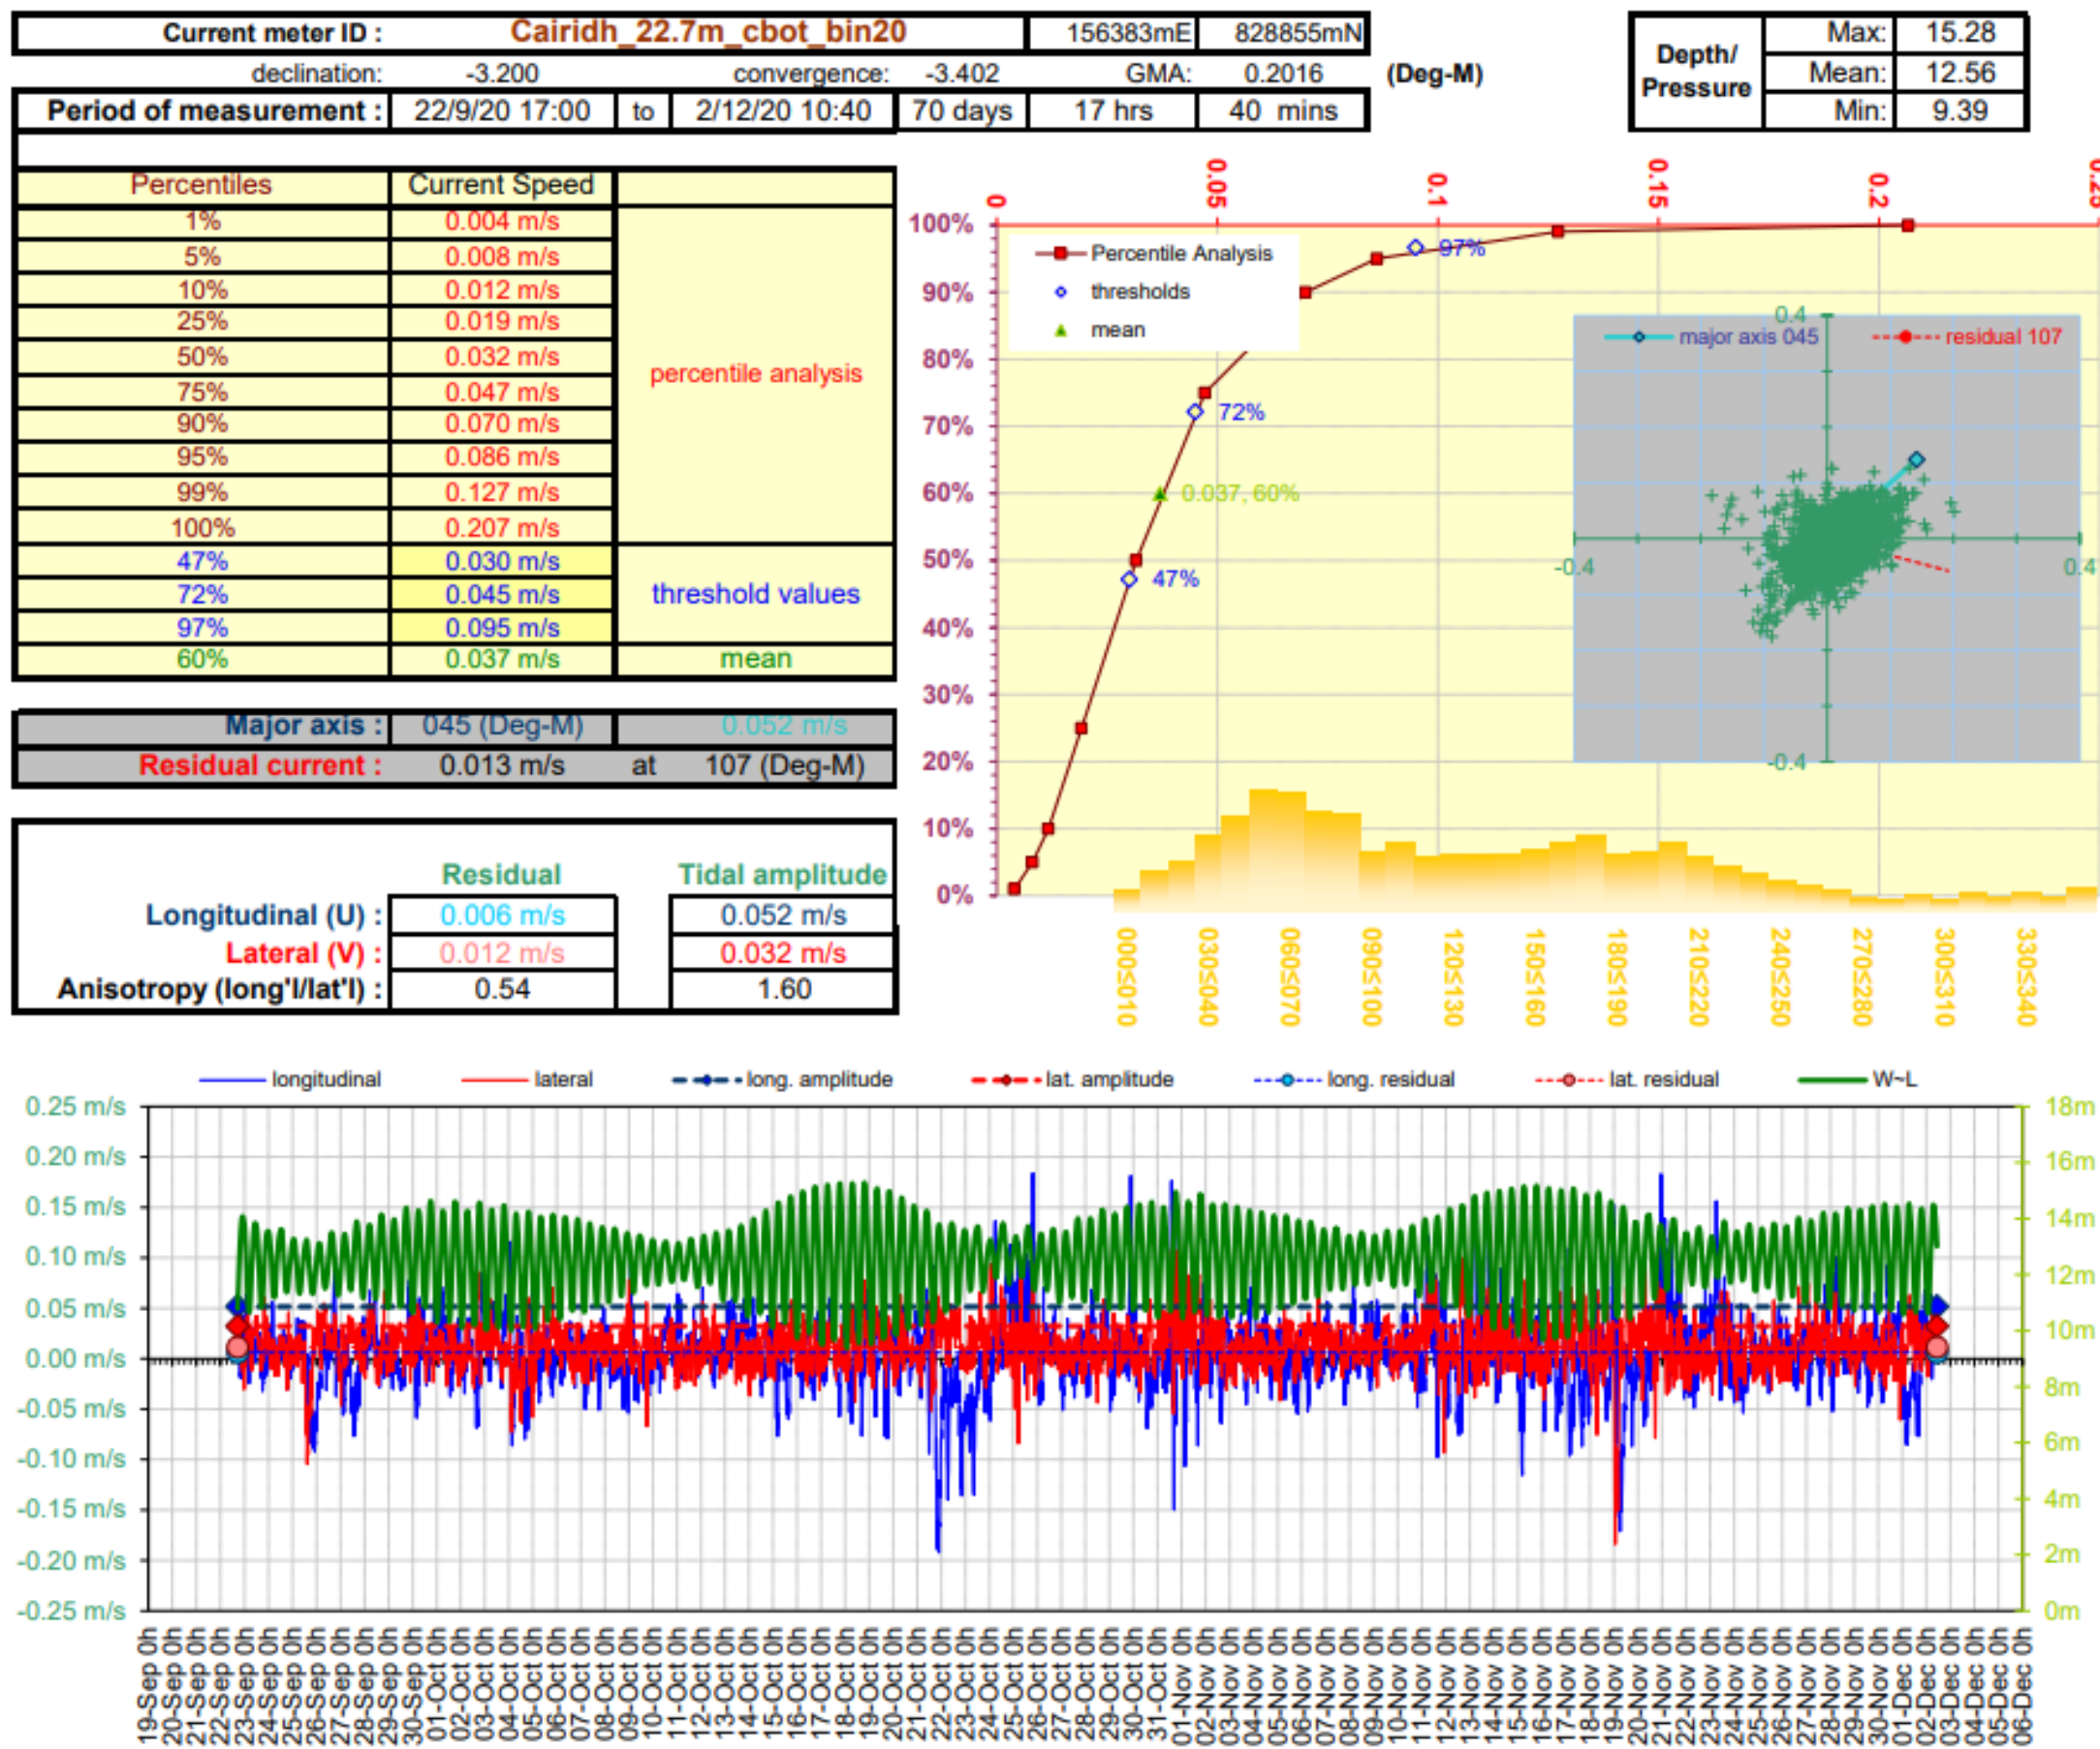


Figure 5. Current Data Summary Sheet for the cage bottom current cell 20, 22.7m from seabed, 22<sup>nd</sup> September to 2<sup>nd</sup> December 2020 inclusive (ID360).

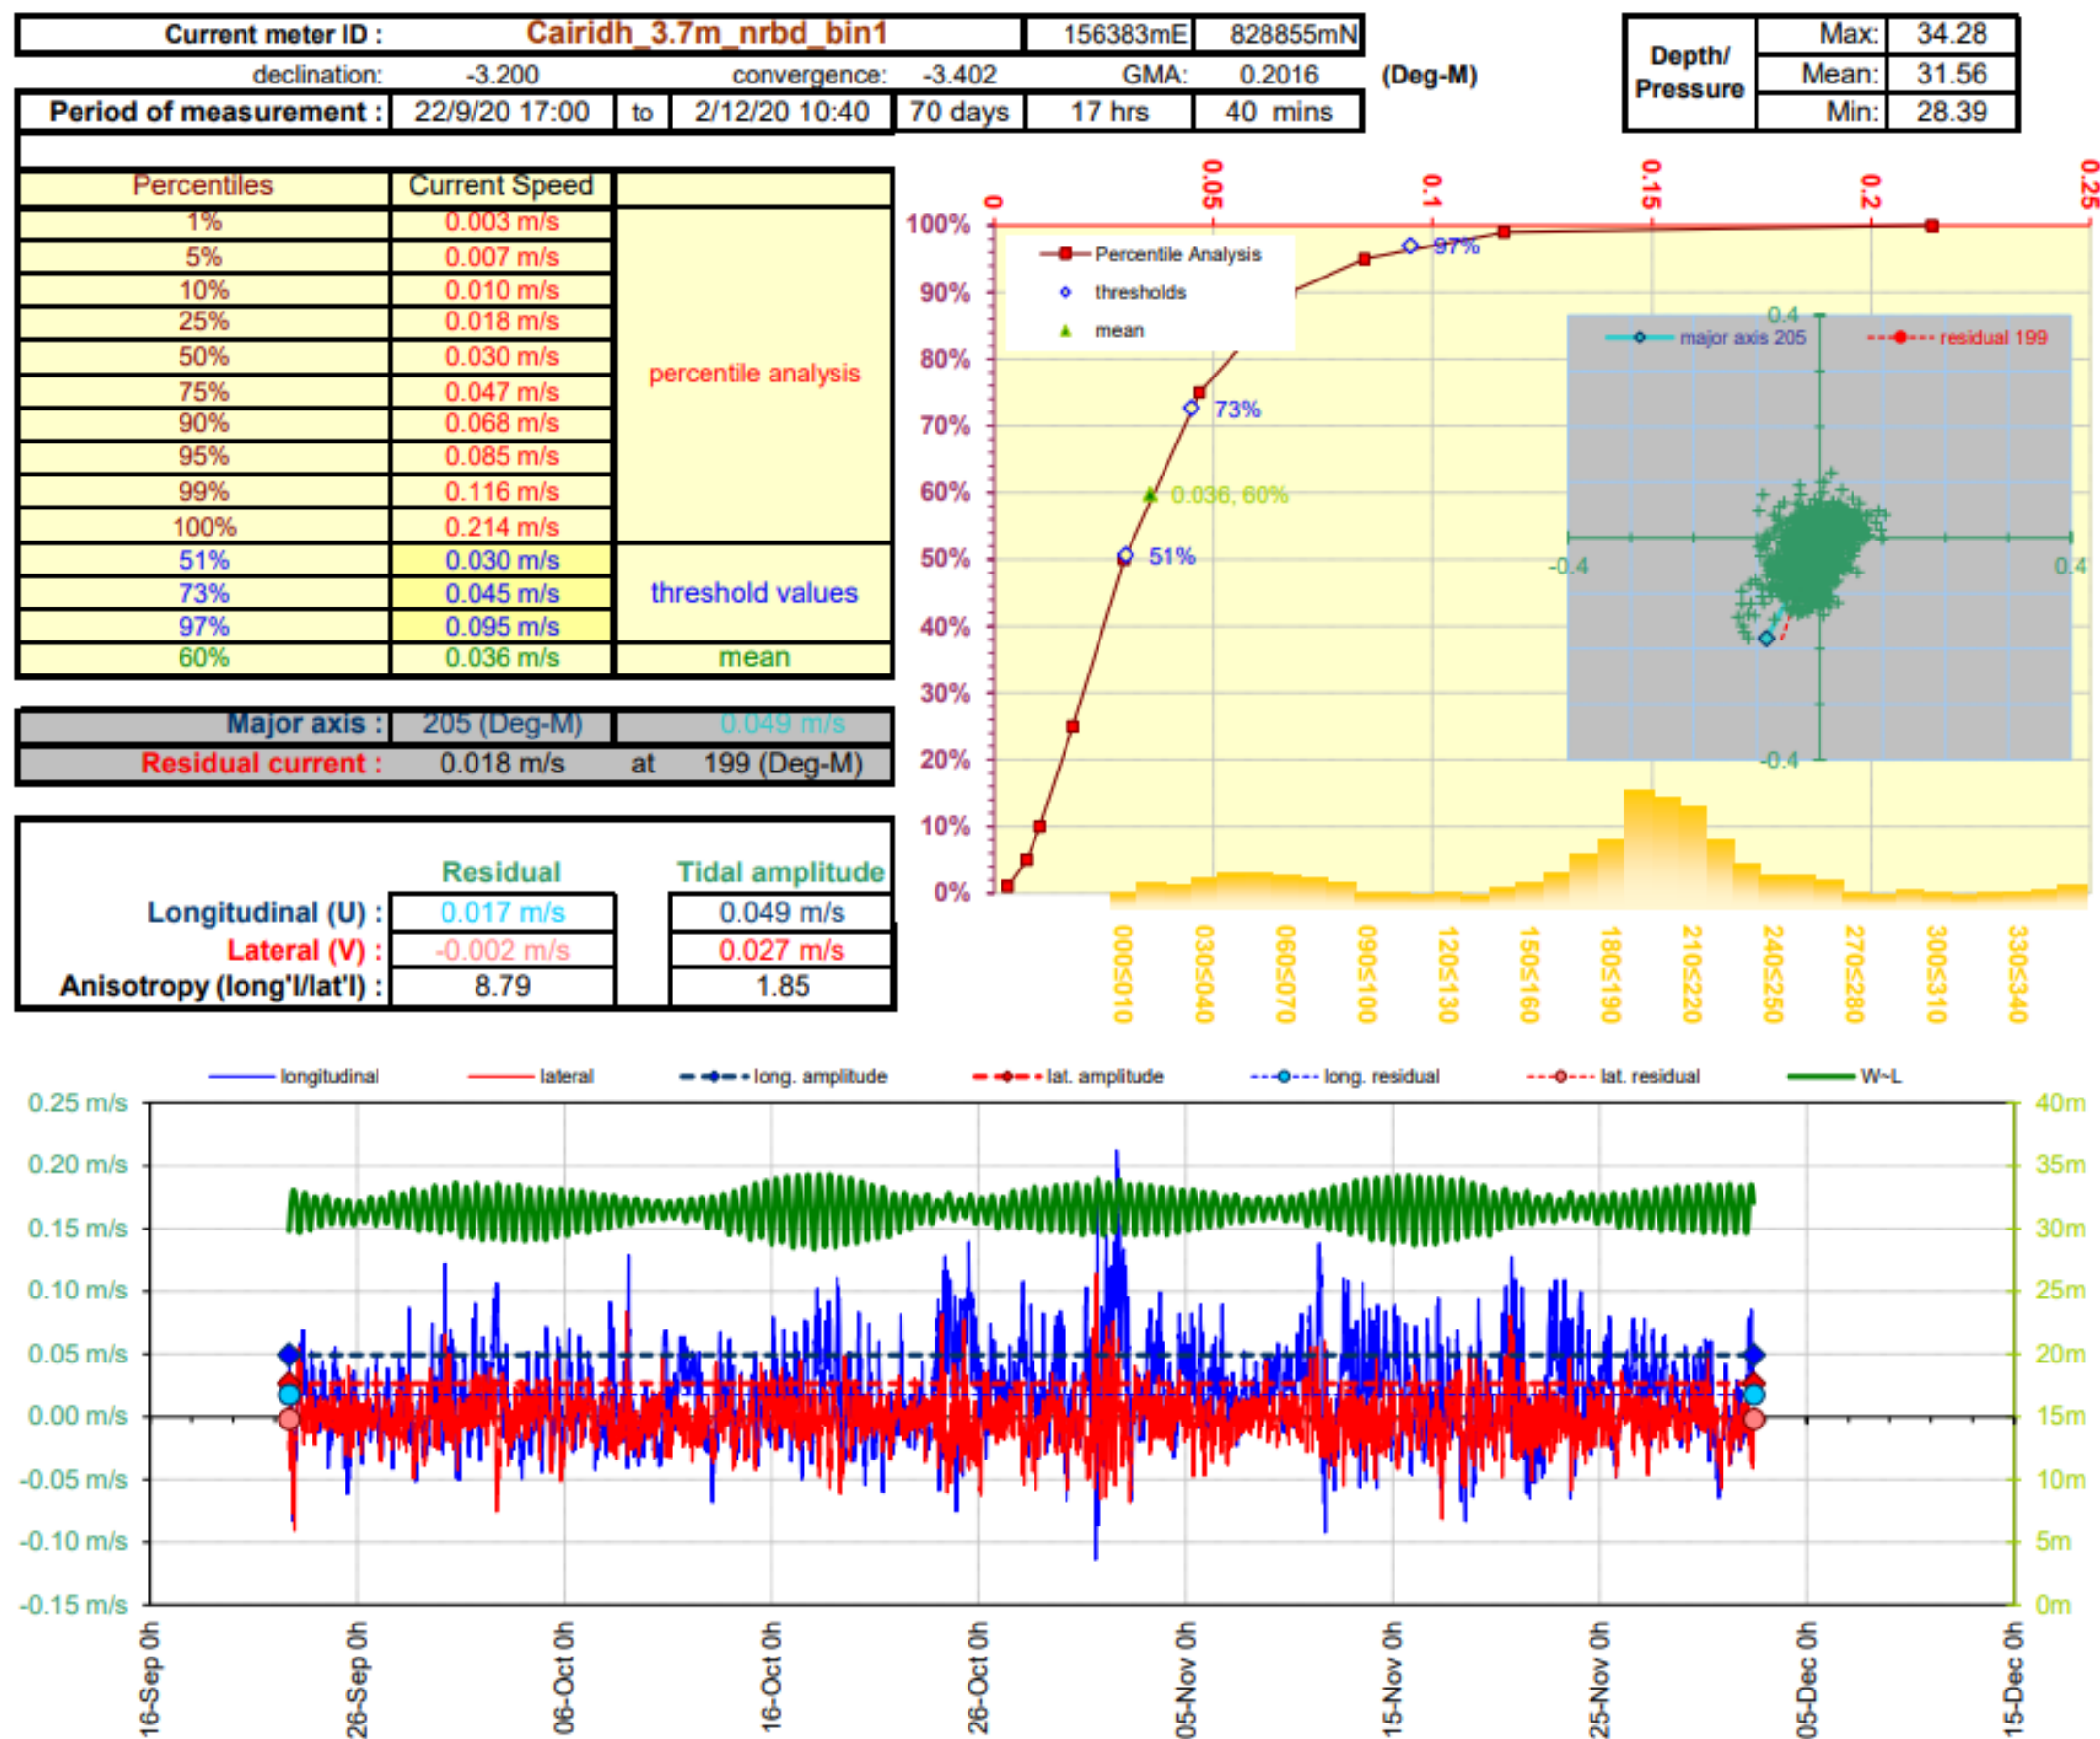


Figure 6. Current Data Summary Sheet for the near bottom current cell 1, 3.7m from seabed, 22<sup>nd</sup> September to 2<sup>nd</sup> December 2020 inclusive (ID360).

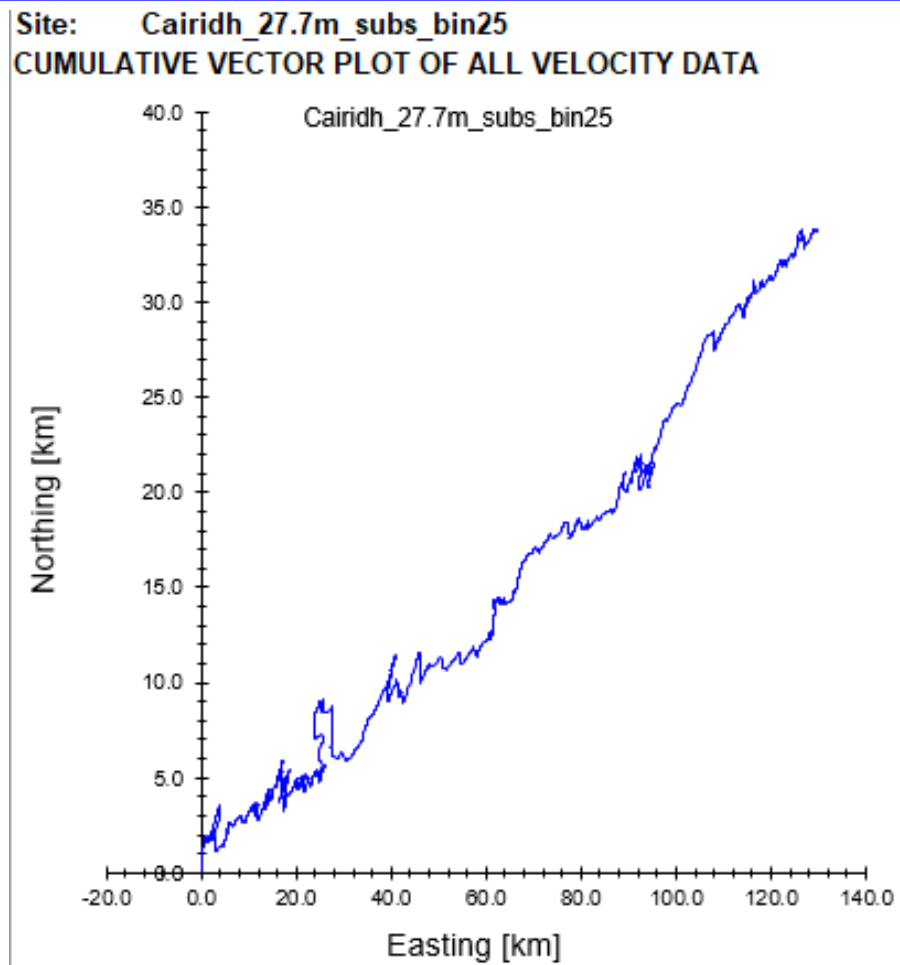


Figure 7. Cumulative Vector Plot of all velocity data from near surface cell for ID360.

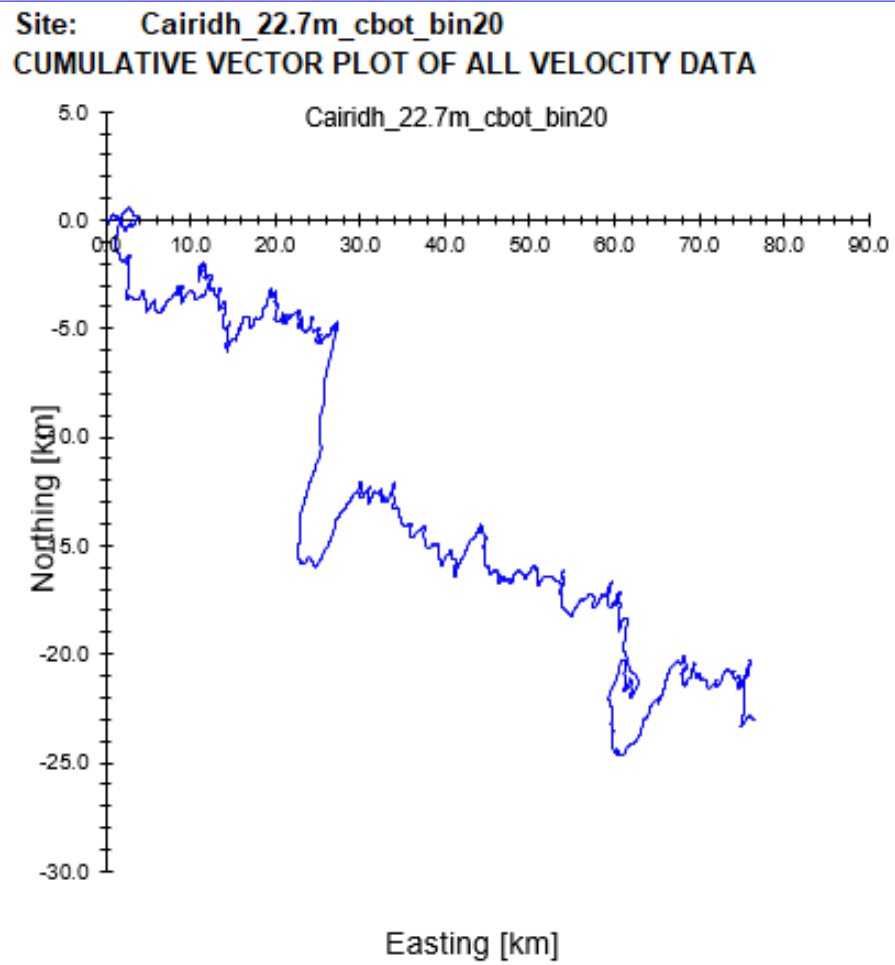


Figure 8. Cumulative Vector Plot of all velocity data from cage bottom cell for ID360.

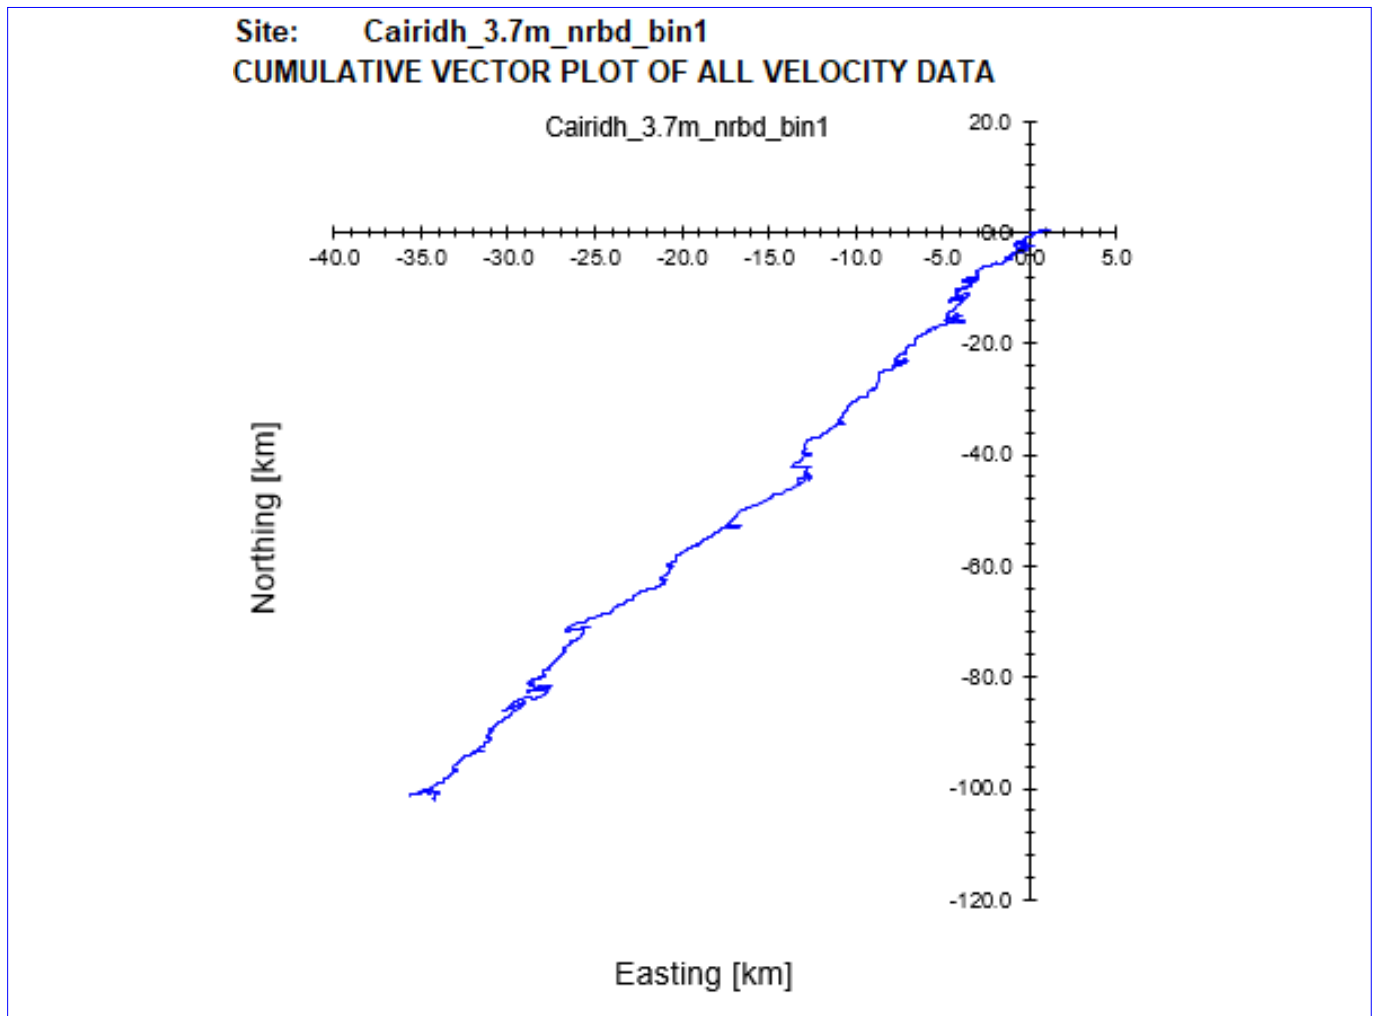


Figure 9. Cumulative Vector Plot of all velocity data from near bottom cell for ID360.



## 5. Summary of Current Data – ID360

Site Name: Cairidh  
 Data start date: 22/09/2020  
 Data end date: 02/12/2020  
 Mean Water Depth: 35.28m

Table 2. Summary of current meter deployment

	Cell	Depth Below Surface (m)	Distance from Seabed (m)	Mean current speed (cm/s)
Near surface:	25	4.39	27.72	4.48
Cage bottom:	20	9.39	22.72	3.71
Near bed:	1	28.39	3.72	3.56
Average current speed:				3.89

Table 3. Ranked percentiles for current speed at all three depths

Cell	Ranked Percentile (%) for mean speed	≤3cm/s (%)	≥4.5cm/s (%)	≥9.5cm/s (%)
Near surface:	63	40	37	8
Cage bottom:	60	47	28	3
Near bed:	60	51	27	3

Table 4. Major axis

Cell	Major Axis (Deg-G)
Near surface:	055
Cage Bottom:	045
Near bed:	205

Table 5. Mean and residual currents

Cell	Mean Speed (m/s)	Residual Speed (m/s)	Residual Parallel (m/s)	Residual Normal (m/s)	Tidal Amplitude Parallel (m/s)	Tidal Amplitude Normal (m/s)
Near Surface:	0.045	0.022	0.021	0.008	0.064	0.034
Cage Bottom:	0.037	0.013	0.006	0.012	0.052	0.032
Near Bed:	0.036	0.012	0.002	0.012	0.050	0.031

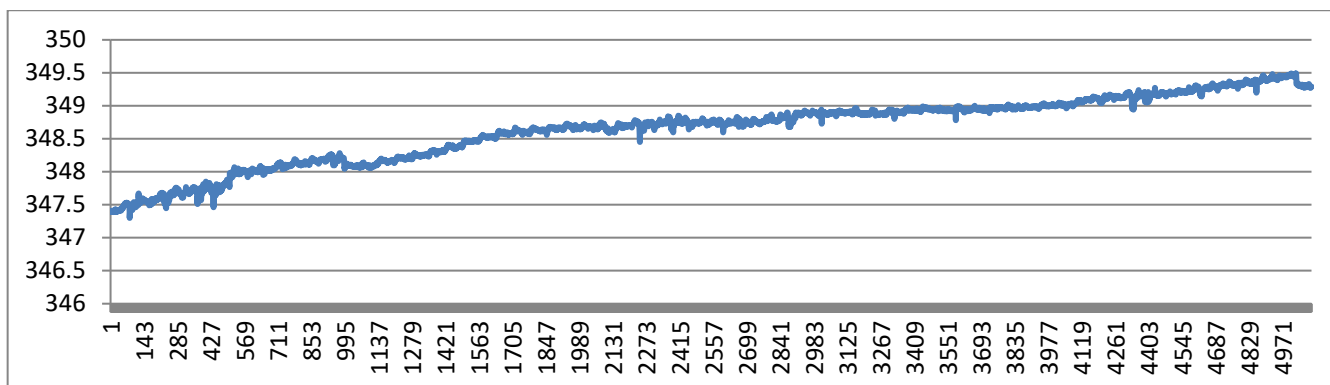


Figure 10. Summary of heading data from deployment ID360.

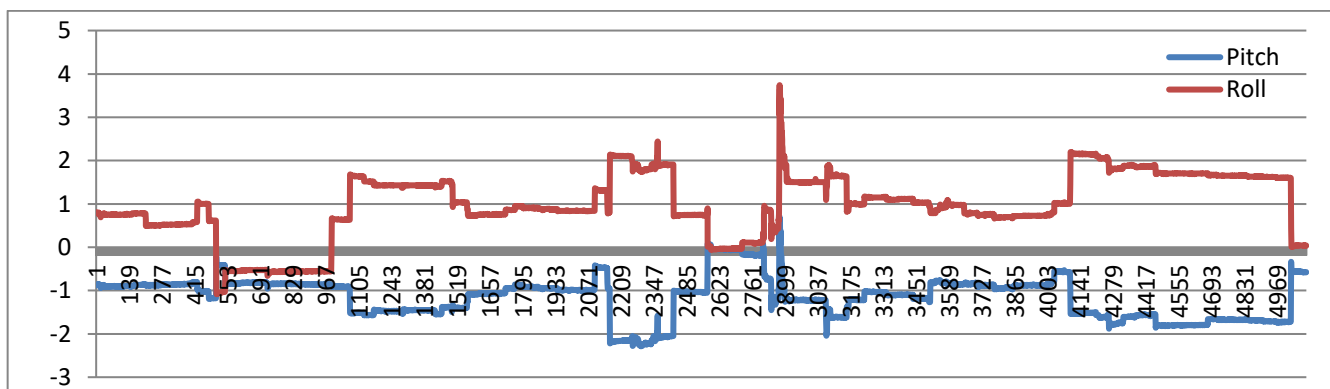


Figure 11. Summary of pitch and roll data from deployment ID360.

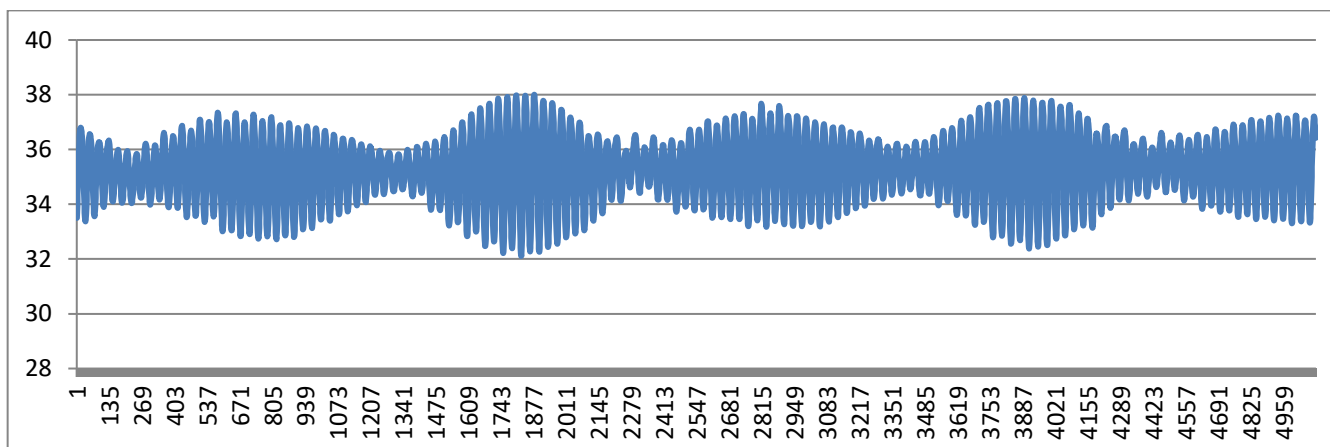


Figure 12. Pressure data from deployment ID360.

## 6. Conclusion

MOWI has collected and analysed current and bathymetric data for the proposed technical variation at the Cairidh fish farm. The analysed current data for the 70 days and 19 hours period are believed to be reliable and representative of the proposed location. The bathymetric data from the wider-area UKHO bathymetry data provided a coherent bathymetric dataset for the site.

## Annex 1. Survey Equipment Deployment Log

Location: Cairidh  
 Nearest tidal port: Broadford Bay, Isle of Skye  
 Time zone: UTC  
 Meter switched on: 17:00 22/09/2020  
 Meter switched off: 12:00 02/12/2020  
 Period used for this report: 17:00 22/09/2020 – 10:40 02/12/2020  
 ADCP serial number: 24615  
 Meter position: 57.28513°N -6.04417°W  
 156383 E 828855 N  
 Minimum water depth: 32.11 m (31.41m measured by ADCP + 0.7 m \*)  
 Water depth (Chart Datum): 31.91 m (minimum water depth - 0.2 m tide timetable)  
 Mean water depth: 35.98 m (35.28 measured by ADCP + 0.7 m \*)  
 Depth of meter from surface: 32.68 m (below mean low water spring to transducer)  
 Height of meter from seabed: 0.7 m to transducer head  
 Sounding at deployment: 49 m @ 17:00 on 22/09/2020

Table A1. ADCP meter settings:

Reference:	Transducer
Bin size (m):	1.0
Dist to 1 <sup>st</sup> bin (m):	3.02
Number of bins:	49
Frequency (kHz):	307
Recording interval (mins):	20
No. pings per ensemble:	300
Magnetic correction:	0
Ensemble:	300
Standard Deviation (cm/sec):	0.63
Time/Ping (seconds):	2