

Seaforth, Loch Seaforth

Hydrographic Data Report: Deployment ID348

25th June to 6th September 2020

Report written by [REDACTED] (Oceanographer/Hydrodynamic Modeller)
 Report checked by [REDACTED] (Senior Environmental Analyst)

July 2021
 Mowi Scotland Limited

Registered in Scotland No. 138843 Registered Office, 1st Floor, Admiralty Park Admiralty Road Rosyth FIFE KY11 2YW	<small>OFFICE</small> Farms Office, Glen Nevis Business Park PH33 6RX Fort William	<small>PHONE</small> +44 1397 715065	<small>FAX</small> -
	<small>POSTAL</small> Farms Office, Glen Nevis Business Park PH33 6RX Fort William	<small>MAIL</small> [REDACTED]	<small>WEB</small> http://mowi.com

CONTENTS

1.	INTRODUCTION	5
2.	MATERIALS & METHODS.....	6
	<i>2.1 Depth Survey</i>	<i>6</i>
	<i>2.2 Current Data</i>	<i>6</i>
	<i>2.3 Magnetic Variation</i>	<i>7</i>
	<i>2.4 Data Processing.....</i>	<i>8</i>
	<i>2.5 Meteorological Data</i>	<i>10</i>
3.	RESULTS AND DISCUSSION	11
4.	HYDROGRAPHIC DATA SUMMARY SHEETS	12
5.	SUMMARY OF CURRENT DATA – ID348.....	18
6.	CONCLUSION.....	19
	APPENDIX 1. SURVEY EQUIPMENT DEPLOYMENT LOG	20
	DEPLOYMENT DETAILS.....	20

LIST OF FIGURES

Figure 1. Site location (top) and layout (bottom) of the fish pens at Noster (blue) and Seaforth (red). The deployment locations are marked by a black triangle (▲).	5
Figure 2. Interpolated bathymetry derived from the UK Hydrographic Office and local depth survey data. Location of the ADCP deployments (▲) are shown. Noster (blue) and Seaforth (red) pen locations are indicated.	6
Figure 3. Mean intensity of the ADCP signal for the ID348 dataset plotted by bin number	8
Figure 4. Current Data Summary Sheet for the surface current cell 40, 82.68 m from seabed, 25 th June to 6 th September 2020 inclusive (ID348).	12
Figure 5. Current Data Summary Sheet for the cage bottom current cell 30, 62.68 m from seabed, 25 th June to 6 th September 2020 inclusive (ID348).	13
Figure 6. Current Data Summary Sheet for the near bottom current cell 1, 4.68m from seabed, 25 th June to 6 th September 2020 inclusive (ID348).	14
Figure 7. Cumulative Vector Plot of all velocity data from near surface cell for ID348.	15
Figure 8. Cumulative Vector Plot of all velocity data from cage bottom cell for ID348.	16
Figure 9. Cumulative Vector Plot of all velocity data from near bottom cell for ID348.	17
Figure 10. Summary of pitch, roll, heading & pressure data from deployment ID348.	19

LIST OF TABLES


Table 1: ADCP deployments at Noster and Seaforth from 2015 onwards	7
Table 2: Sentinel V100 ADCP Specifications.	9
Table 3. Summary of current meter deployment	18
Table 4. Ranked percentiles for current speed at all three depths	18
Table 5. Mean and residual currents	18

QUALITY ASSURANCE


Mowi Scotland Ltd is ISO9001 and ISO14001 accredited and all project management follows policies designed to ensure that the collection, collation and reporting of information produced in the course of our operations is done to a consistently high standard meeting the requirements of the end user.

1. Introduction

Mowi Scotland Ltd is preparing an application to the Scottish Environmental Protection Agency (SEPA) for a medicine consent increase at the marine salmon farm Seaforth, situated in Loch Seaforth (Figure 1). Hydrographic surveys were undertaken at Seaforth and neighbouring site Noster in 2020. Hydrographic data at both sites was gathered between 25th June 2020 – 6th September 2020. The purpose of this report is to assess the suitability of the collected hydrographic data at Seaforth (ID348) for input into a hydrodynamic model of the Loch Seaforth region. The data collected at Noster (ID347) has been assessed for suitability in a separate report.

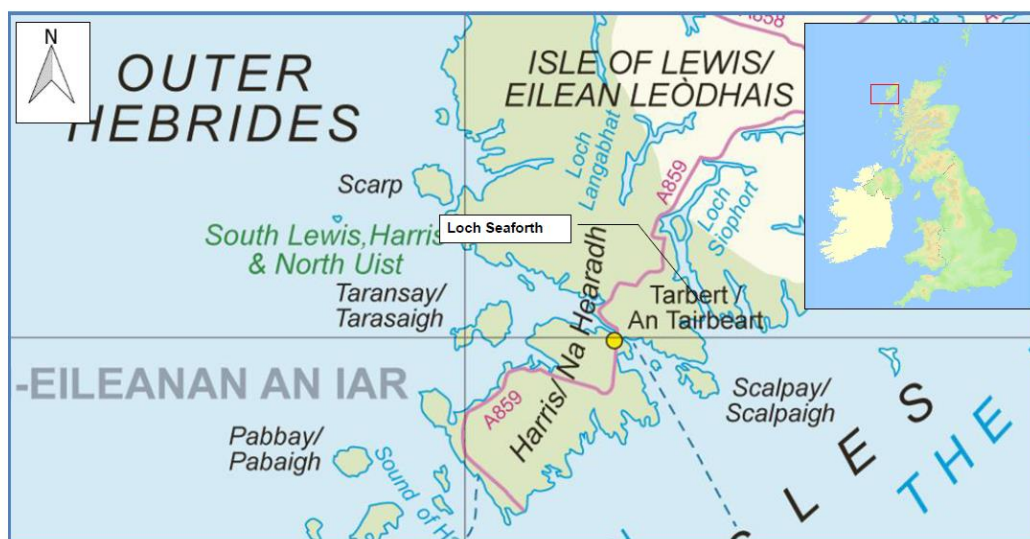

LOCH SEAFORTH, ISLE OF LEWIS		Key:		Not to scale	26/10/2020		0001	Final
GENERAL VIEW:	ORDNANCE SURVEY MAP			Scale	Date	Drawn	Checked	Revision No.
Figure 1	General view showing the location of Loch Seaforth							Status

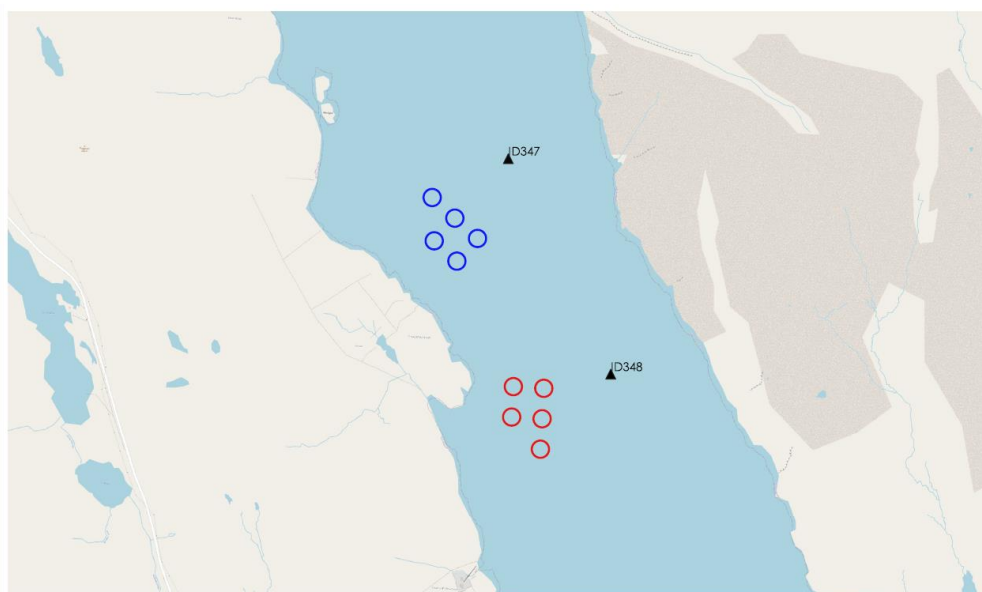

Noster, Loch Seaforth Proposed new equipment layout		Key:		Scale:	Date:	Drawn:	
		▲ Current Meter ○ Fish Farm Pens		10,000	20/07/2021		

Figure 1. Site location (top) and layout (bottom) of the fish pens at Noster (blue) and Seaforth (red). The deployment locations are marked by a black triangle (▲).

2. Materials & Methods

2.1 Depth Survey

Bathymetry data for the study area was obtained from the UK Hydrographic Office which utilises a variety of source (e.g. digital bathymetry datasets, Admiralty charts, and multibeam surveys). Further information about this data source can be found at:

<https://www.gov.uk/government/news/ukho-data-archiving-centre-inspire-portal-data-refresh>

<http://aws2.caris.com/ukho/mapViewer/map.action>

Further depth data, collected in July 2007 and September 2020 in the immediate vicinity of the pens, were combined and interpolated with the UKHO bathymetric data (Figure 2).

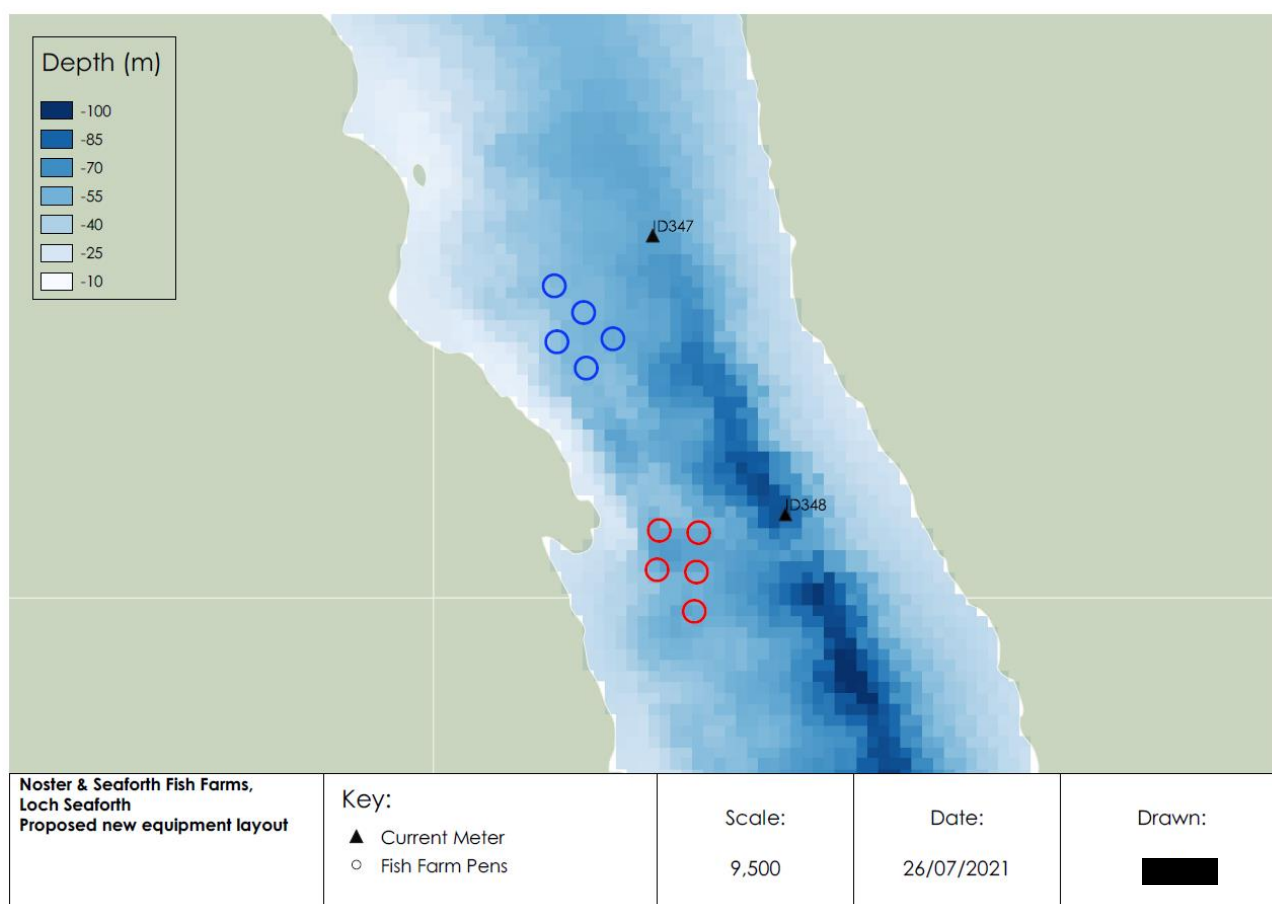


Figure 2. Interpolated bathymetry derived from the UK Hydrographic Office and local depth survey data. Location of the ADCP deployments (▲) are shown. Noster (blue) and Seaforth (red) pen locations are indicated.

2.2 Current Data

The purpose of this hydrographic report is to assess the suitability of the collected hydrographic data for use within a hydrodynamic model for the Loch Seaforth region. The data contained in this report were recorded at Seaforth from 25th June to 6th September 2020 (73 days and 7 hours of data; deployment ID348). In addition to current data, bathymetry data were also collected to support this report.

Data collection using traditional ADCP deployments was challenging at the Seaforth and Noster sites. Deploying instruments close to the pens led to interference on the ADCP beams, compromising data quality. Deploying further away from the pens, in open water undisturbed by the farm pens, led to challenges with water depth which increased rapidly to the East. Since 2015, there have been 13 ADCP deployments undertaken at Noster & Seaforth (Table 1) in an attempt to get good quality data records, but most have suffered either interference or water depth issues. The deployments above (ID347 and ID348), and previous deployments not reported here, were made in water depths approaching 100m. Since data from the upper ~15% of the water column may be affected by acoustic reflection off the sea surface, deploying in these deeper depths led to no data being collected in the top 20m. In the associated Marine Modelling report, this lack of data in the surface 20m is compensated by using tracks of dye releases to calibrate the surface currents of the hydrodynamic model.

The Sentinel V100 (Wide) ADCP (Table 2), within its mooring frame, was positioned at 57.93127N, - 6.67433W (123400E 903120N), which was approximately 286m from the nearest shoreline and approximately 275m from the centre of the cage group (Figure 1). The transducer head was 70 cm from the base of the mooring frame. The mean depth (derived from the pressure sensor) at the Sentinel V100 ADCP position was 109.63 m.

No initial soundings were taken before the deployment of the ADCP due to the hand held sounder used being unable to read depths of > 60m. The cell size was set to 2.0 m to accommodate the deep depths found in Loch Seaforth. The number of cells was set to 55.

Data was automatically written and stored to the internal memory within the Sentinel V100 ADCP main body and then downloaded to computer after completion of the deployment period via WiFi.

Table 1: ADCP deployments at Noster and Seaforth from 2015 onwards

ID	Site	Deployment Date	Depth (m)	Deployment Length (days)	Valid days	Latitude	Longitude
50	Seaforth	23/07/2015	70	21	21	57 55.765N	006 40.608W
51	Seaforth	23/07/2015	70	21	0	57 55.727N	006 40.608W
52	Noster	23/07/2015	65	22	0	57 56.057N	006 40.905W
121	Seaforth	07/10/2016	66	72	0	57 55.760N	006 40.628W
122	Noster	07/10/2016	59	80	0	57 56.100N	006 40.926W
138	Seaforth	18/01/2017	62	20	0	57 55.760N	006 40.628W
139	Noster	18/01/2017	56	20	0	57 56.100N	006 40.926W
313	Seaforth	20/11/2019	83	91	0	57 55.852N	006 40.490W
314	Noster	20/11/2019	66	91	0	57 56.172N	006 40.857W
325	Seaforth	19/02/2020	104	72	17	57 55.769N	006 40.376W
326	Noster	19/02/2020	76	76	41	57 56.143N	006 40.709W
347	Noster	25/06/2020	70	73	73	57 56.207N	006 40.810W
348	Seaforth	25/06/2020	109	73	73	57 55.876N	006 40.461W

2.3 Magnetic Variation

No magnetic variation correction was made to the Sentinel V100 ADCP during deployment, this was undertaken to the data after the instrument was recovered and data downloaded. The magnetic variation used was -3.65; this was determined using the World Magnetic Model, produced jointly with the US National Oceanographic and Atmospheric Administration’s National Geophysical Data center. Further details can be found at <http://www.geomag.bgs.ac.uk/navigation.html>

2.4 Data Processing

Upon retrieval of the Sentinel V100 ADCP current meter, all data was downloaded to a computer for analysis. The raw data file was opened in Teledyne’s “Velocity” software and Matlab. Deployment diagnostic data (beam intensity, correlation, pitch and roll) were analysed to confirm that the deployment was successful with the instrument orientated upright. The heading data were also examined to identify any movement of the Sentinel V100 ADCP mooring frame during the deployment.

The diagnostic data suggested that velocities from the first 40 bins were valid (Figure 3). Calculations were undertaken to identify the cells to be used for surface and middle currents. Surface data was taken at an average depth (derived from the pressure sensor) of 24.5 m (cell 40), and cage-bottom data at 44.5 m (cell 30). Surface and middle cell heights above the seabed were 82.68 m and 62.68 m respectively. The bottom cell (cell 1) was at a depth of 102.5 m and 4.68 m above the seabed.

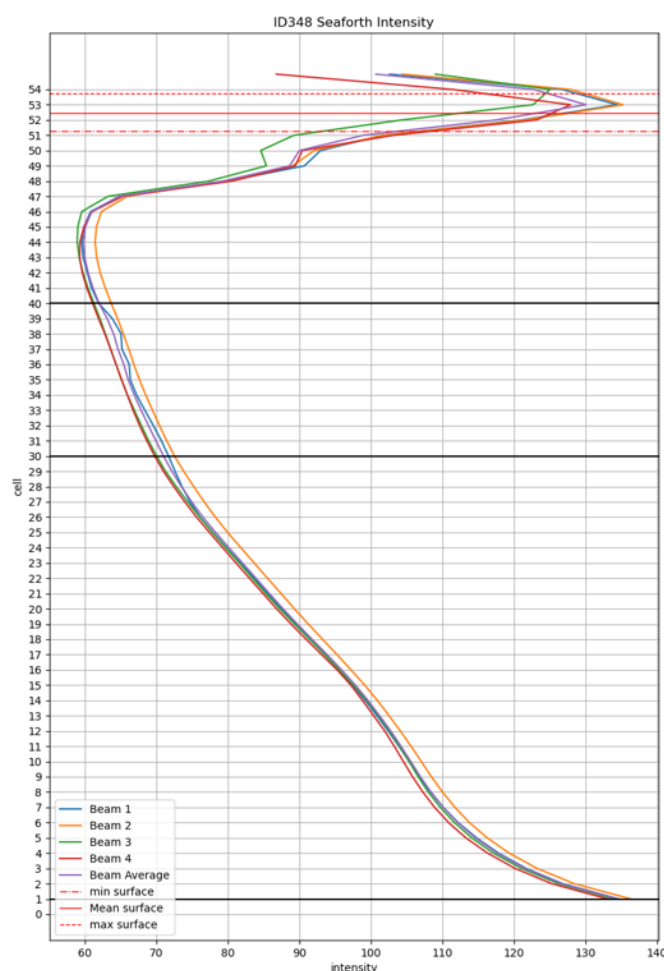


Figure 3. Mean intensity of the ADCP signal for the ID348 dataset plotted by bin number

Table 2: Sentinel V100 ADCP Specifications.

Depth Cell Size ¹	V20 (1000kHz)		V50 (500kHz)		V100 (300kHz)		
	Depth Cell Size ¹	Range (m) ^{2,3} Wide/Narrow	Std Dev (cm/s) ^{3,4} Wide/Narrow	Range (m) ^{2,3} Wide/Narrow	Std Dev (cm/s) ^{3,4} Wide/Narrow	Range (m) ^{2,3} Wide/Narrow	Std Dev (cm/s) ^{3,4} Wide/Narrow
	0.25m	18.0/22.6	19.2/36.5				
	0.3m	19.3/24.0	11.1/20.8				
	0.5m	20.2/24.9	7.1/13.4	44.1/57.6	19.2/36.5		
	1.0m	22.1/26.9	3.6/6.7	50.5/64.6	7.1/13.5	94.5/120.6	10.9/20.6
	2.0m	24.5/29.4	1.7/3.2	56.0/70.6	3.6/6.7	103.5/130.4	5.5/10.3
	4.0m	26.9/32.0	0.8/1.6	63.1/78.2	1.7/3.2	114.6/142.3	2.7/5.2
	6.0m			67.4/82.8	1.1/2.1	121.7/151.5	1.8/3.3
Communications and Recording	Wireless Internal memory	802.11b/g/n One 16GB Micro SD Card included					
Profile Parameters	Velocity accuracy Velocity resolution Velocity range Ping rate	V20/V50: 0.3% of the water velocity relative to the ADCP ±0.3cm/s V100: 0.5% of the water velocity relative to the ADCP ±0.5cm/s 0.1cm/s ±5m/s (default); ±20m/s (maximum) Up to 4Hz					
Echo Intensity Profile	Vertical resolution Dynamic range Precision	Depth cell size 80dB ±1.5dB					
Transducer and Hardware	Beam angle Configuration Depth rating Materials	25° 4-beam, convex; 5th beam vertical 200m Transducer, housing, and end cap: plastic Connector: metal shell					
Standard Sensors	Temperature (mounted on transducer) Compass (magneto-inductive sensor) Tilt (MEMS accelerometers) Pressure sensor (mounted on transducer)	Range -5° to 45°C, precision ±0.4°C, resolution 0.1° Accuracy 2° RMS, resolution 0.1°, max. dip angle 85° Pitch range ±90°, roll range ±180°, accuracy 2° RMS, precision 0.05° RMS, resolution 0.1° Range 300m, accuracy 0.1%FS					
Power	External DC input Internal battery voltage Battery capacity; over-the-counter @0°C Battery pack @5°C	12–20VDC 18VDC new 100 watt hours (typical) 510 watt hours					
Software	Teledyne RDI's new software included	ReadyW—Pre-deployment (testing, planning, and data recovery) ⁵ Velocity—Post-processing (data handling, display, and export) ⁶					
Environmental	Standard depth rating Operating temperature Storage temperature (without batteries) Weight in air Weight in water	200m -5° to 45°C -30° to 60°C 7.5kg – 16.0kg 1.6kg – 6.0kg					
Available Options	External battery case • AC/DC power converter • 5th beam (at time of order only) • Waves processing • Straight or right-angle metal shell connector						
Dimensions	Special configuration drawing available upon request						

1. User's choice of depth cell not limited to the typical values specified.
2. Ranges specified are typical at temperature of 5°C and salinity of 35psu; longer ranges are possible.
3. User selects the bandwidth mode; wide = 25% or narrow = 6%.
4. Standard deviations (Std Dev) are typical values for single ping data.
5. Resident in ADCP accessed via a web browser.
6. Windows™ based software program.

Specifications subject to change without notice.

The distance to the near bed cell is automatically calculated based on the configuration settings of the instrument, using the following equation:

$$\text{Distance to centre of first cell} = (0.5 * \text{cell size}) + \text{blanking distance} + (\text{Transmit} + \frac{\text{lag}}{2}) \quad (1)$$

This is the distance from the transducer head to the centre of the first cell which equated to 3.98 m. For this deployment, and following the manufacturers recommendations to obtain the best quality data, the blanking distance was set to 1.6m, the cell size to 2.0m, the lag to 0.42m and the transmit distance was 1.17m. These values, added to the height of the transducer head, give the actual height of the centre of the first cell above the seabed of 4.68m.

Standard deviation has been assessed throughout the deployment to identify accurate and reliable data for near bed, middle (net depth) and surface cells using the following equation:

$$\text{Cell StdDev} = \text{Instrument StdDev} * \sqrt{\frac{\% \text{ valid pings}}{100} * 300} \quad (2)$$

The Instrument Standard Deviation (StdDev) in Equation 2 is determined using the deployment settings when the meter is programmed, examples of the StdDev values for different configurations are shown in Table 2. This deployment had a cell size of 2m which equates to an Instrument StdDev of 5.5 cm/s.

The Percentage of valid pings used to calculate Cell StdDev is derived using “Percentage Good” data which allows us to relate the StdDev to the actual data gathered. The percent good data is available for 1, 2, 3 and 4 beams which represent the following:

- Percent good 1 = % of good data computed from 3 Beams
- Percent good 2 = % of bad data due to more than 2 Beams
- Percent good 3 = % of bad data due to error velocity exceeded
- Percent good 4 = % of good data computed from 4 Beams

The method described has been used to calculate the Standard deviation throughout the deployment for the surface, middle and bottom cells; the average StdDev values for the surface, middle and bottom was 0.63cm/s, 0.63cm/s and 0.65cm/s respectively which are all within the SEPA criteria of 2cm/s.

2.5 Meteorological Data

The collection of meteorological data is no longer required to support the assessment process and consequently has not been undertaken. The current data used were collected using multiple deployments and over a longer period and thus provides a more realistic representation of site conditions than short deployments, thus allowing an assessment of the influence of meteorological conditions.

3. Results and Discussion

A summary of the current data is shown in Figure 4 to Figure 10 and in Table 3 to Table 5. Over the period analysed for this report, the near-surface, middle and bottom cells had current speed averages of 4.94 cm/s, 4.59 cm/s and 8.09 cm/s respectively. This gave an overall average of 5.87 cm/s. The orientation of the tidal velocities was northwest - southeast.

Residual currents at the surface and mid-depth were toward the north-west (330°G and 327°G, Figure 7. And Figure 8. respectively); near the seabed, the residual flows during the deployment period were also northwest ward (128°G, Figure 9). The magnitude of the residual currents for the surface, middle and bottom cells were moderate, with mean values of 0.024 m/s, 0.012 m/s and 0.035 m/s respectively.

4. Hydrographic Data Summary Sheets

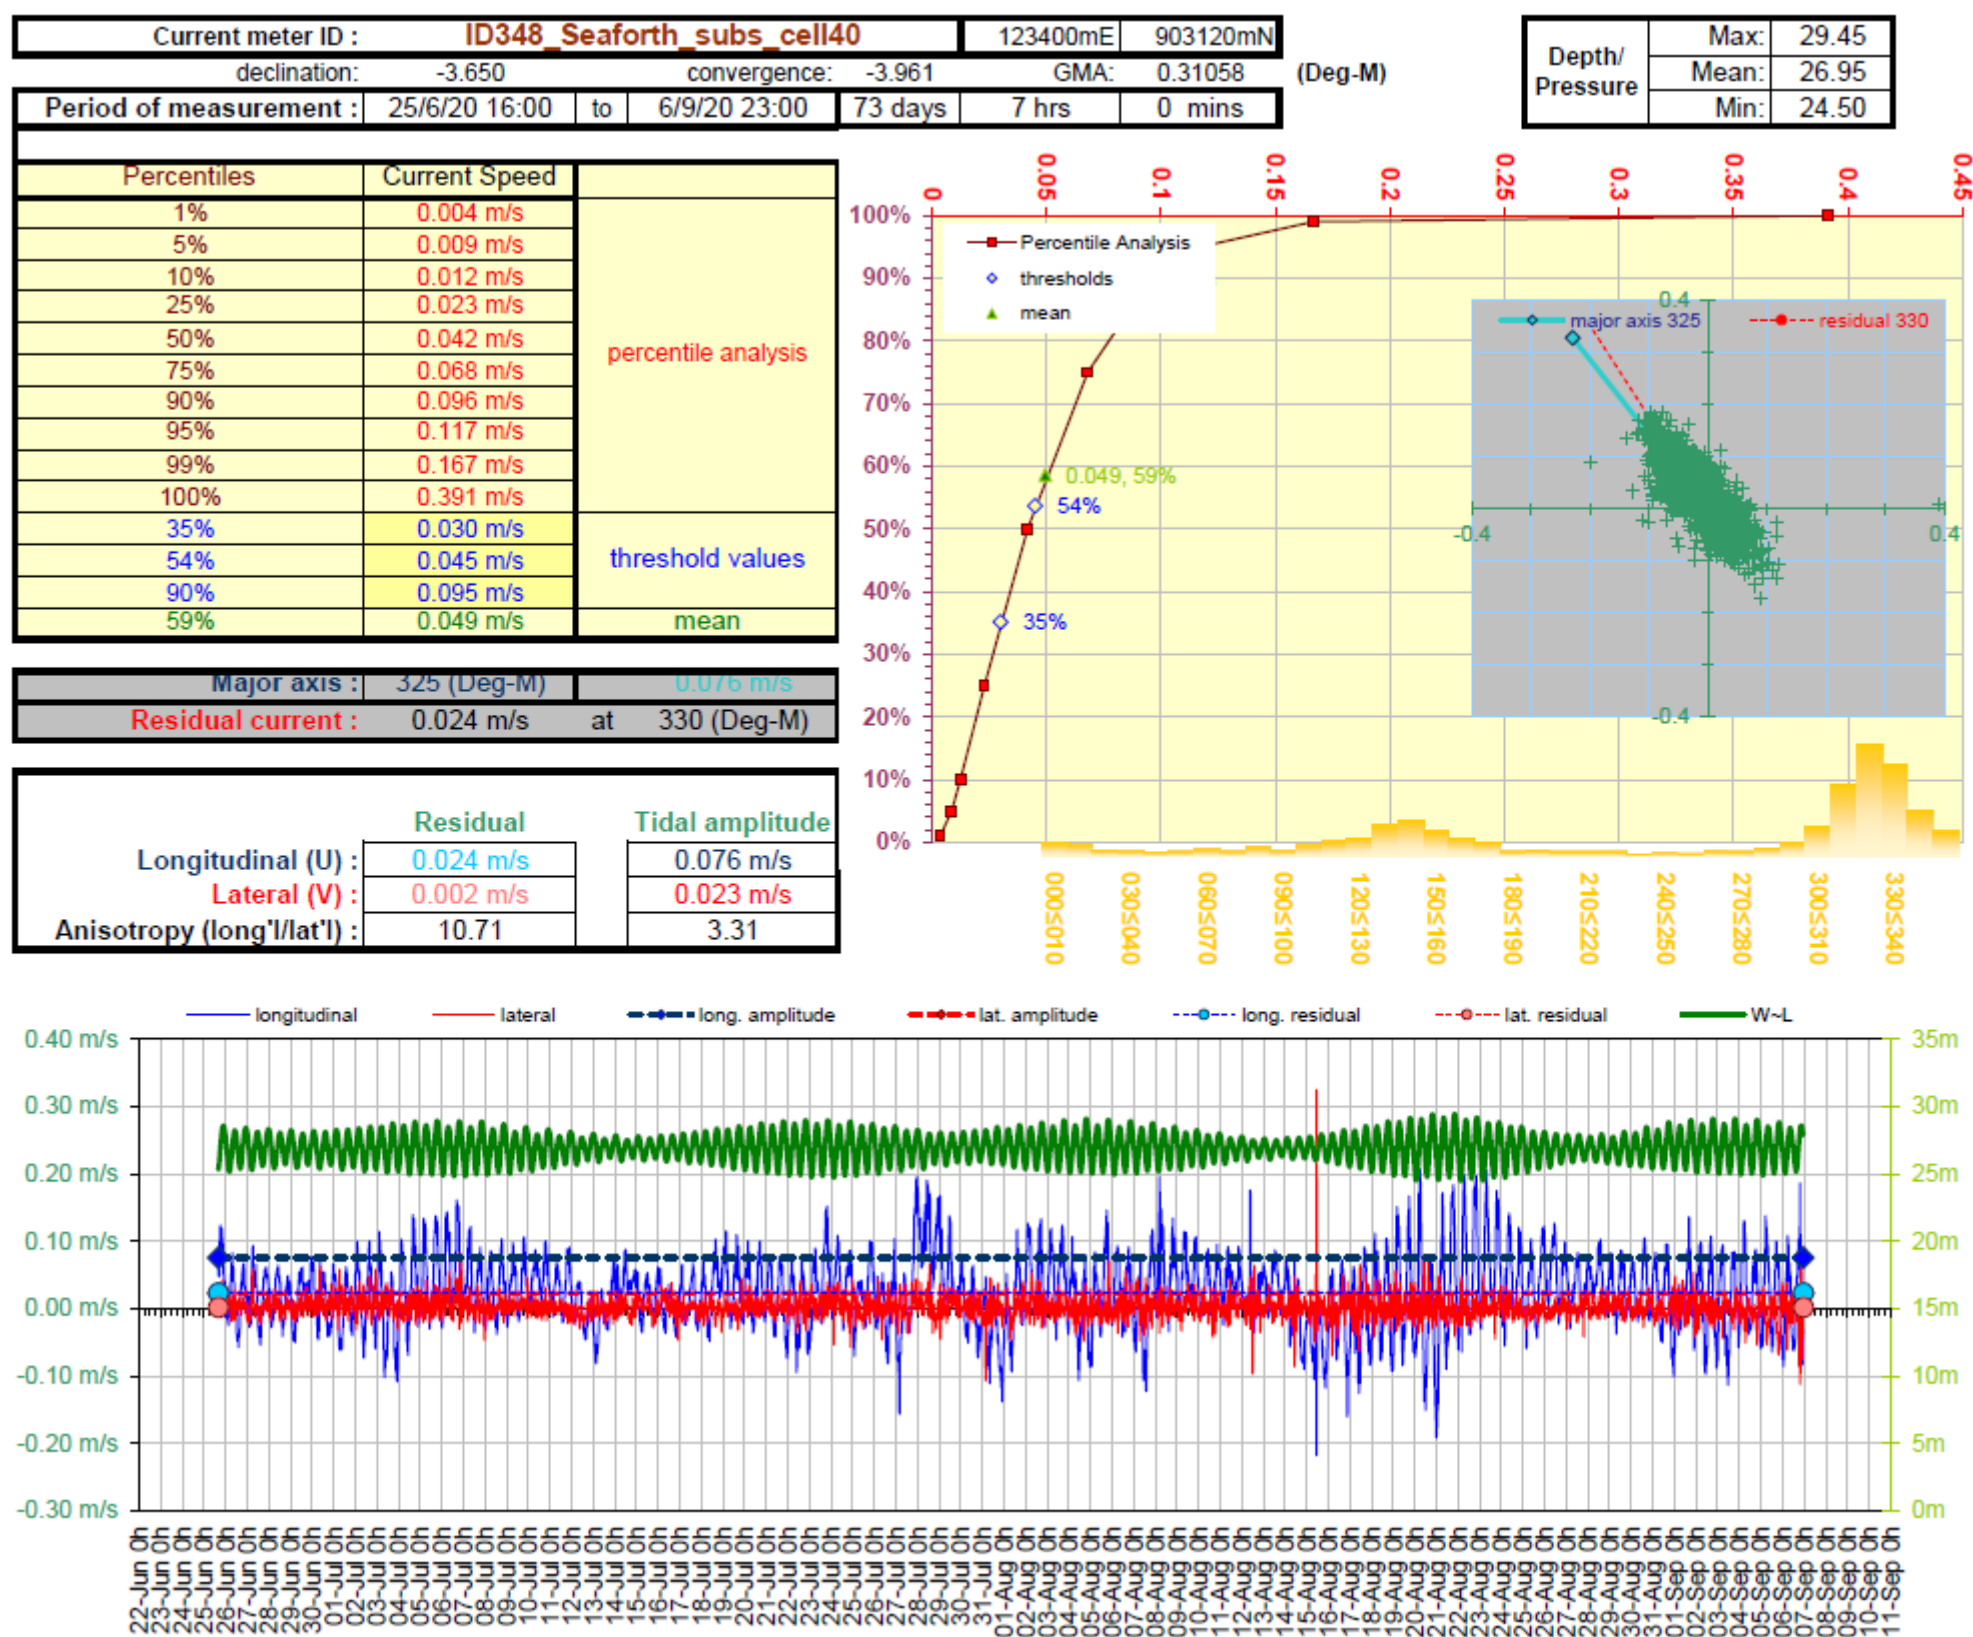


Figure 4. Current Data Summary Sheet for the surface current cell 40, 82.68 m from seabed, 25th June to 6th September 2020 inclusive (ID348).

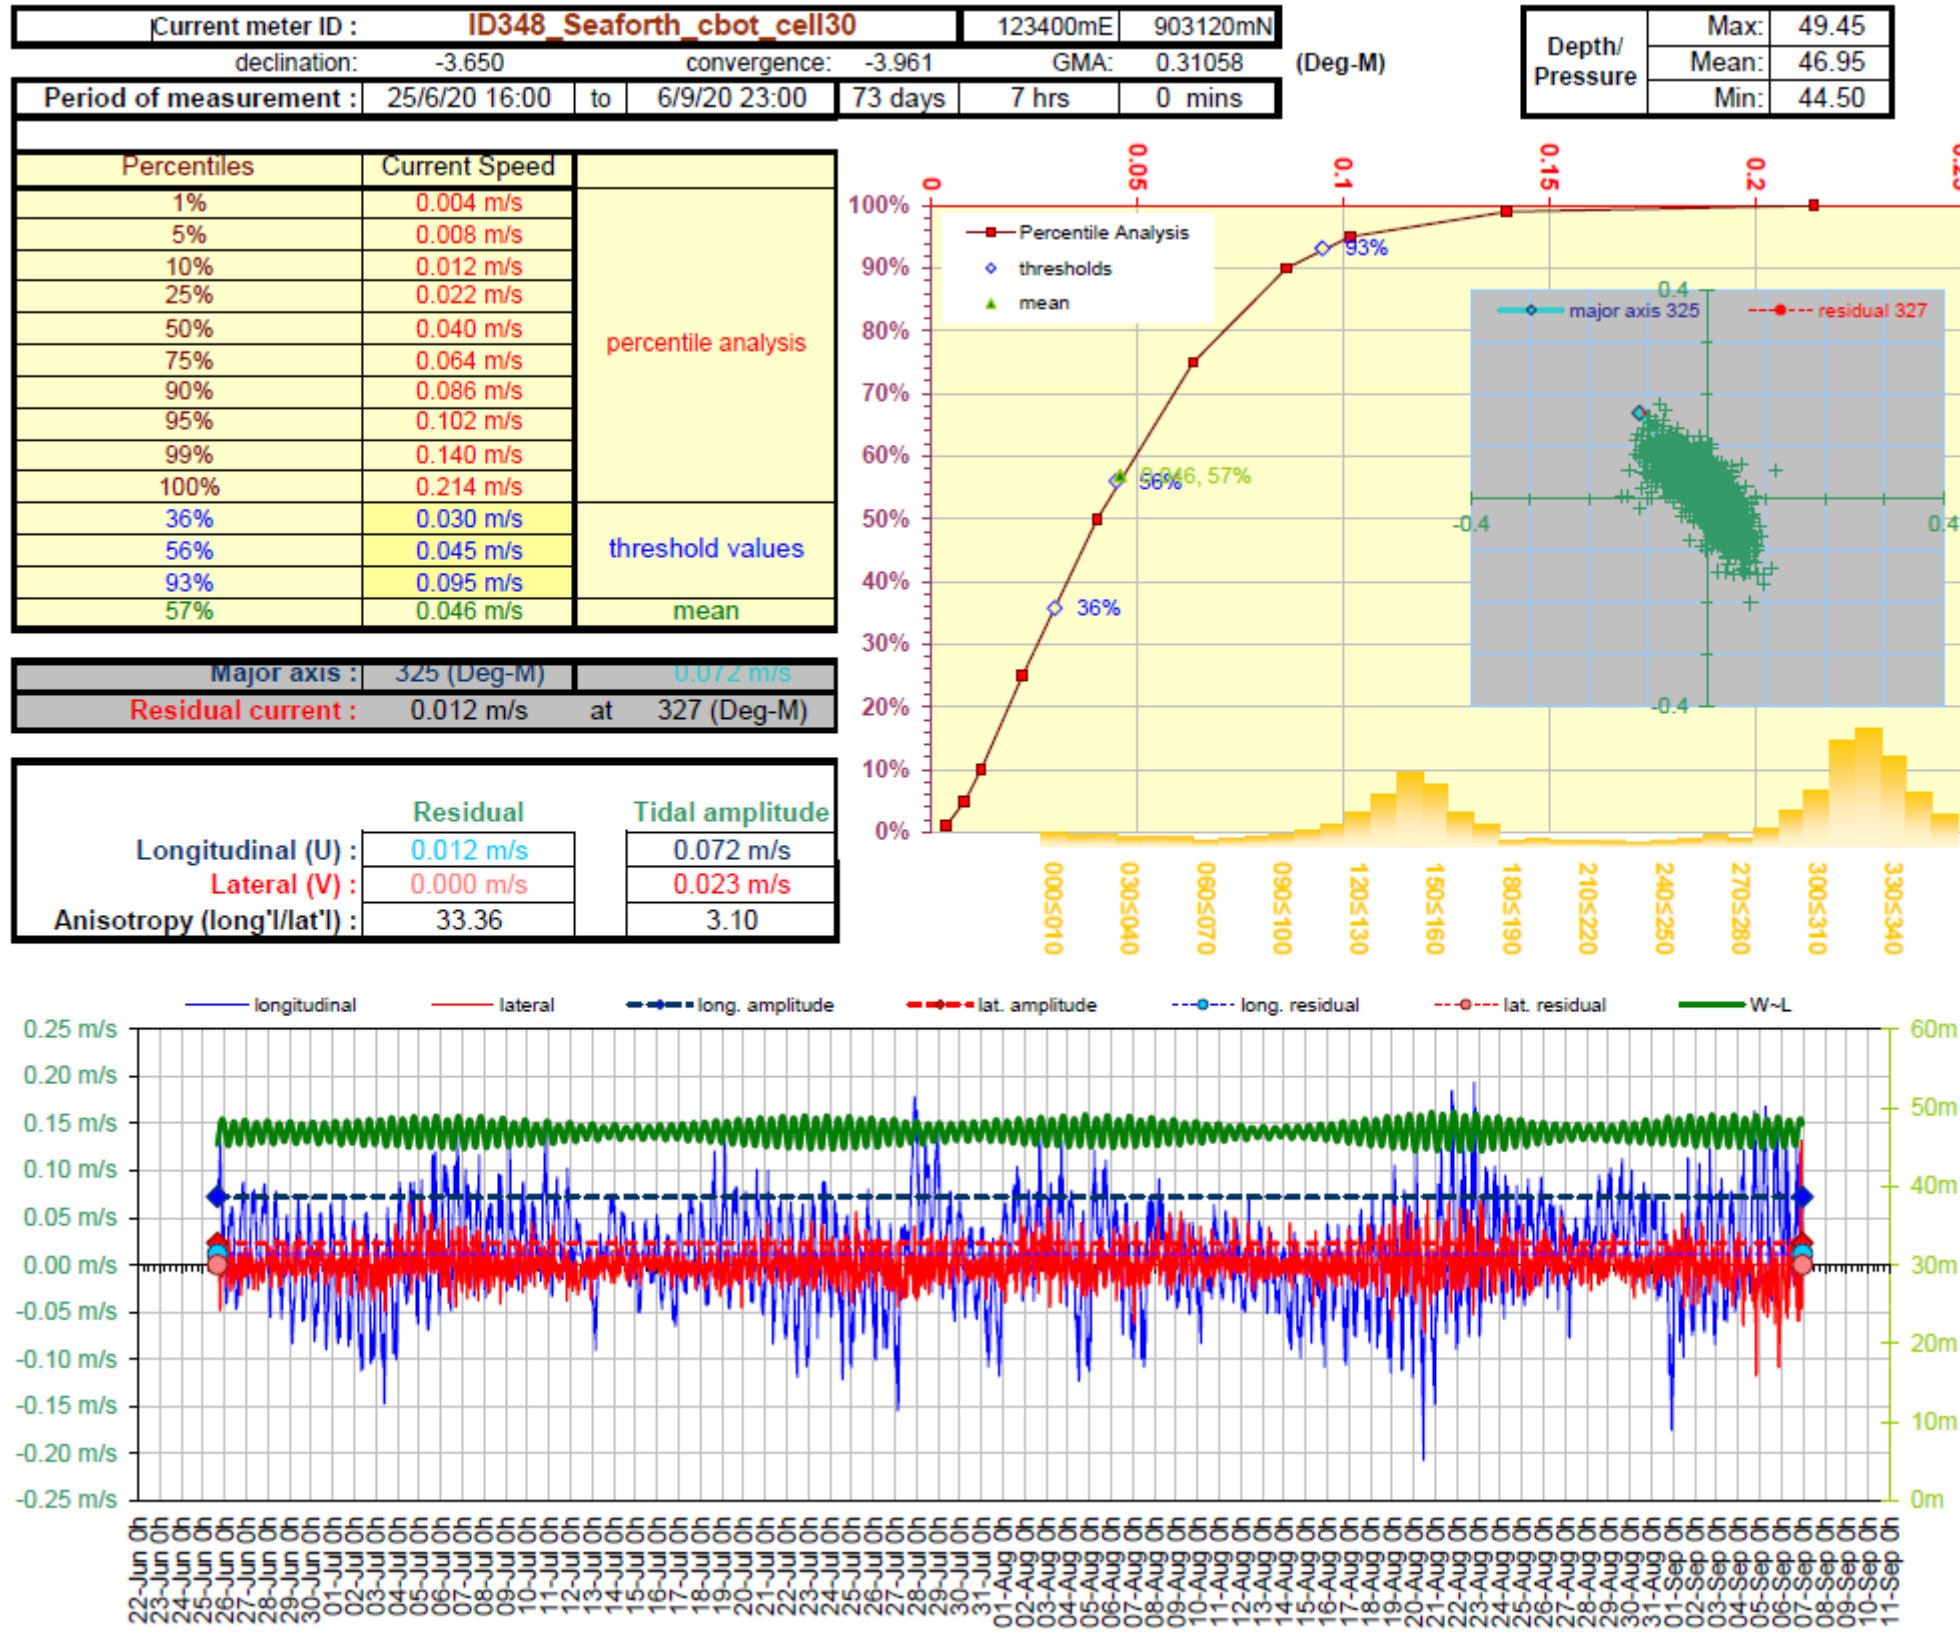


Figure 5. Current Data Summary Sheet for the cage bottom current cell 30, 62.68 m from seabed, 25th June to 6th September 2020 inclusive (ID348).

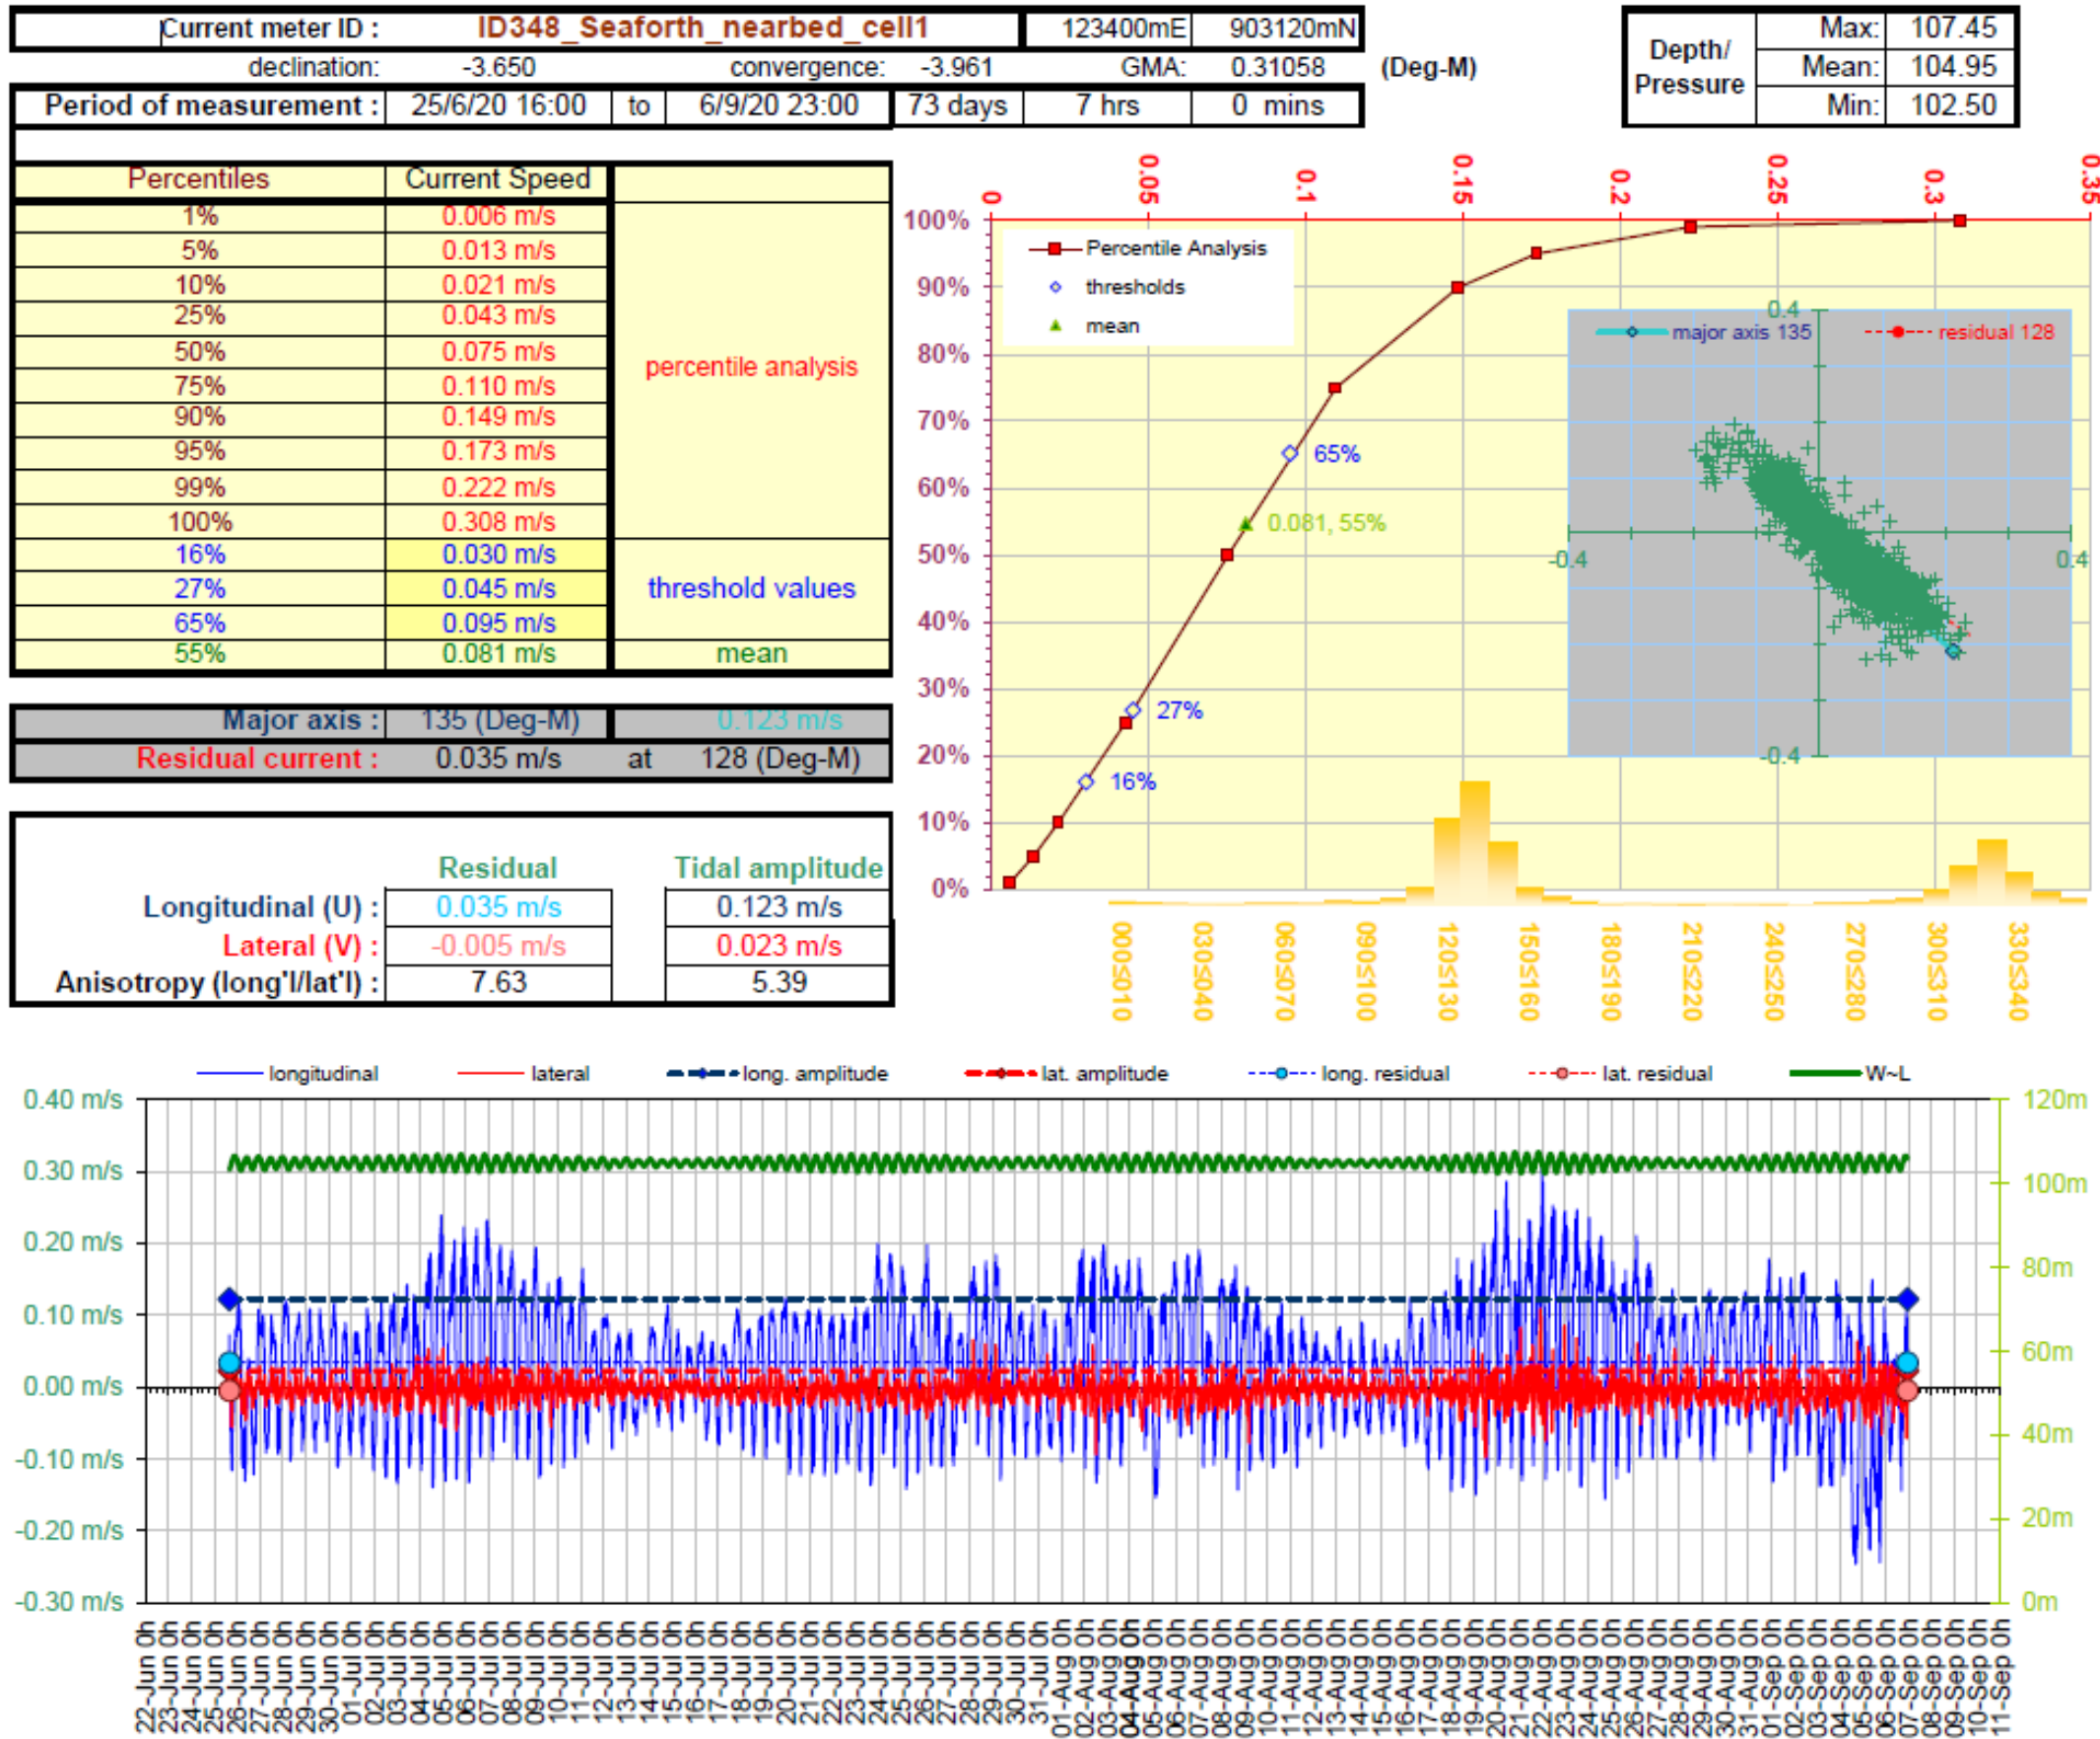


Figure 6. Current Data Summary Sheet for the near bottom current cell 1, 4.68m from seabed, 25th June to 6th September 2020 inclusive (ID348).

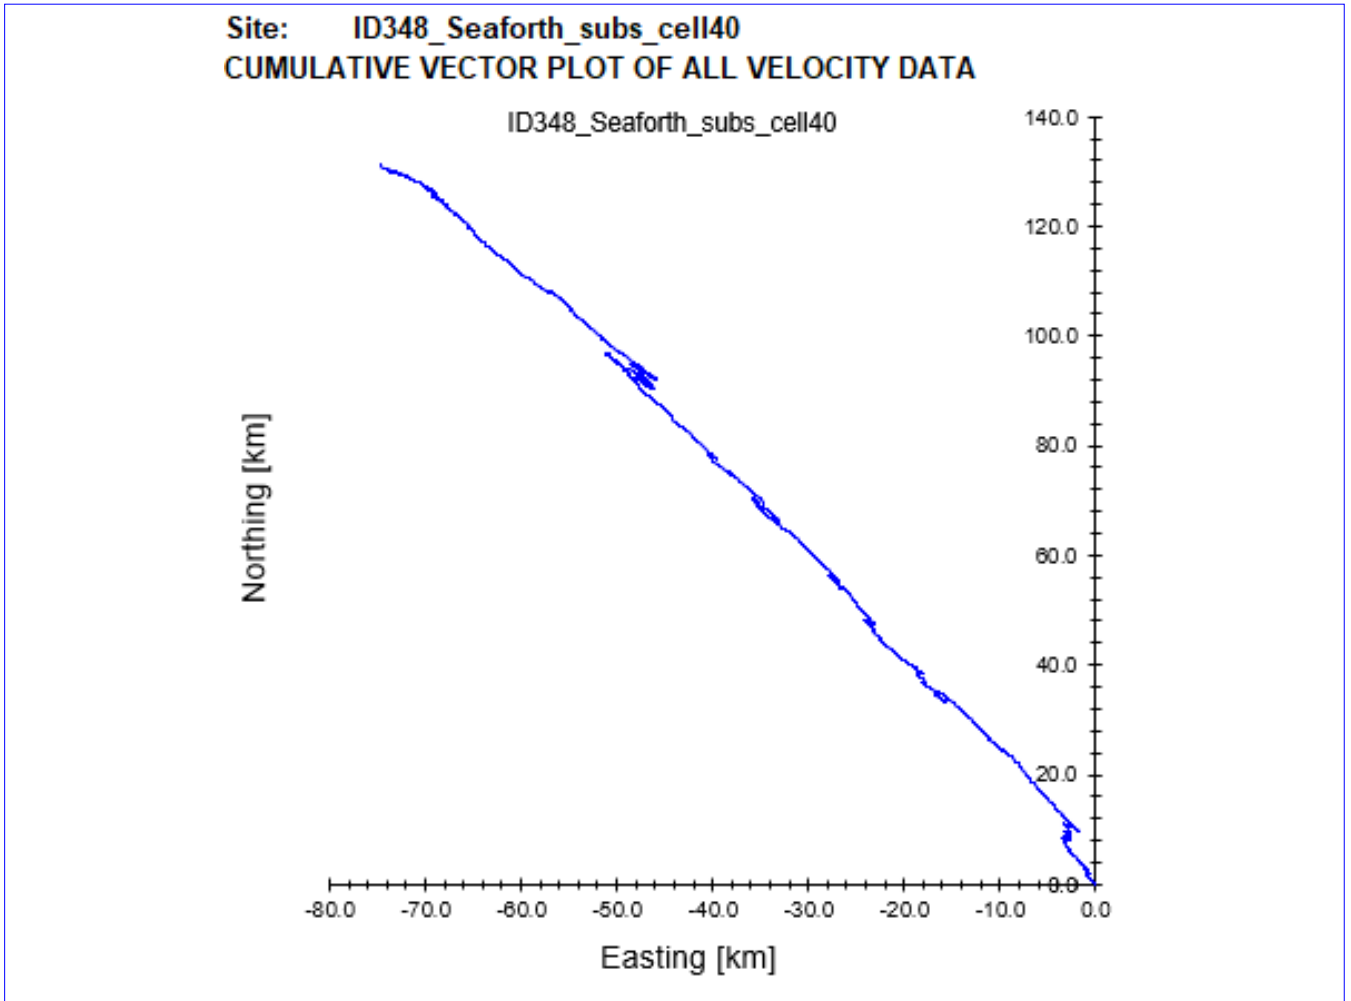


Figure 7. Cumulative Vector Plot of all velocity data from near surface cell for ID348.

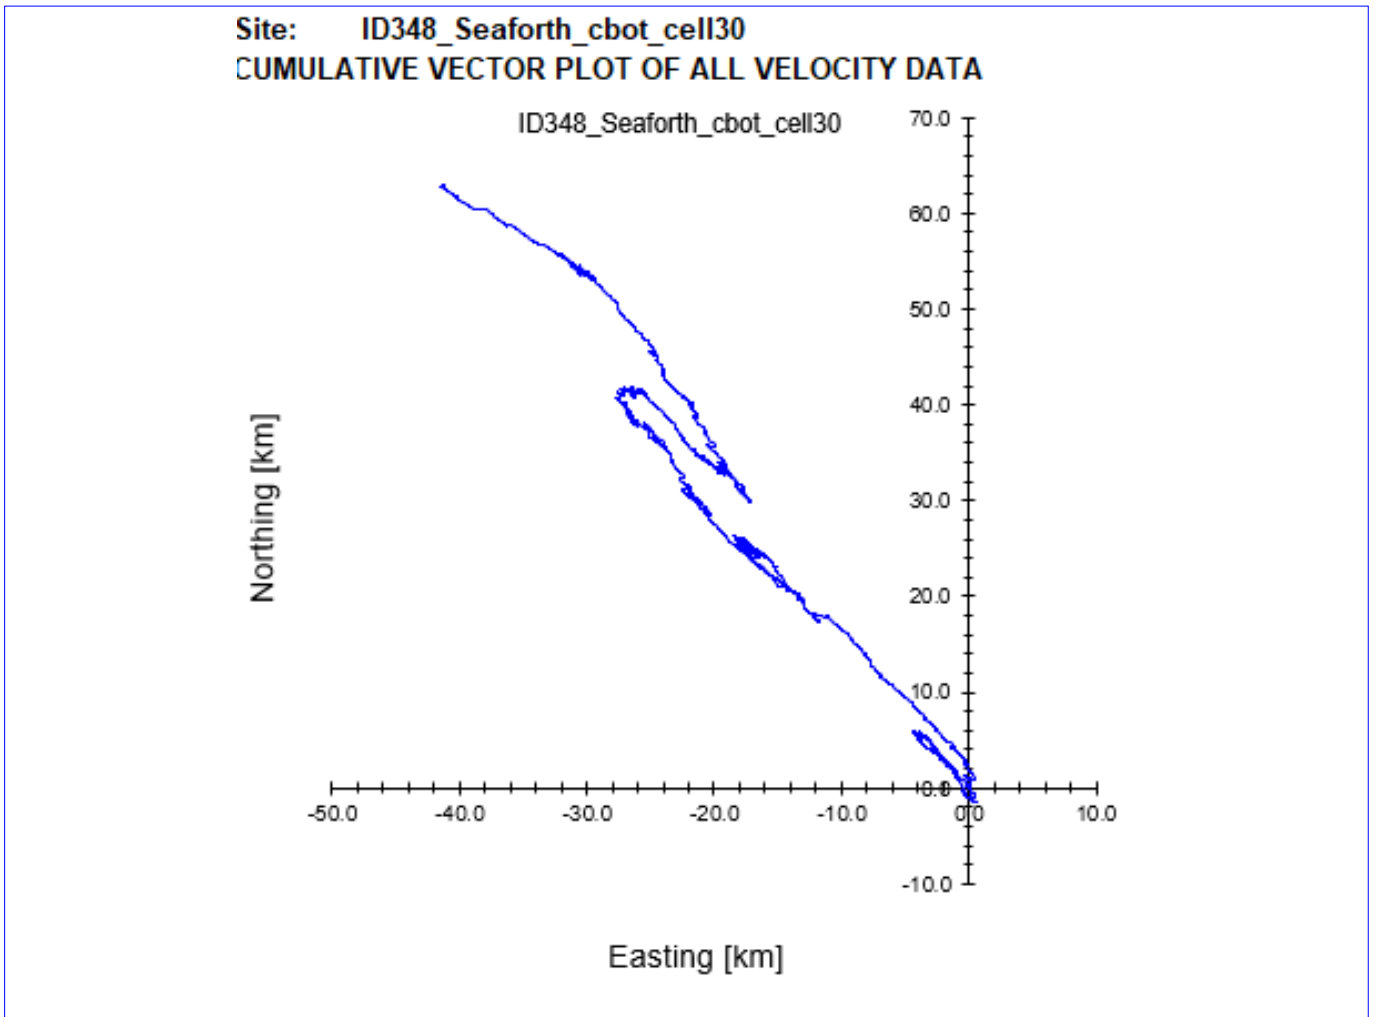


Figure 8. Cumulative Vector Plot of all velocity data from cage bottom cell for ID348.

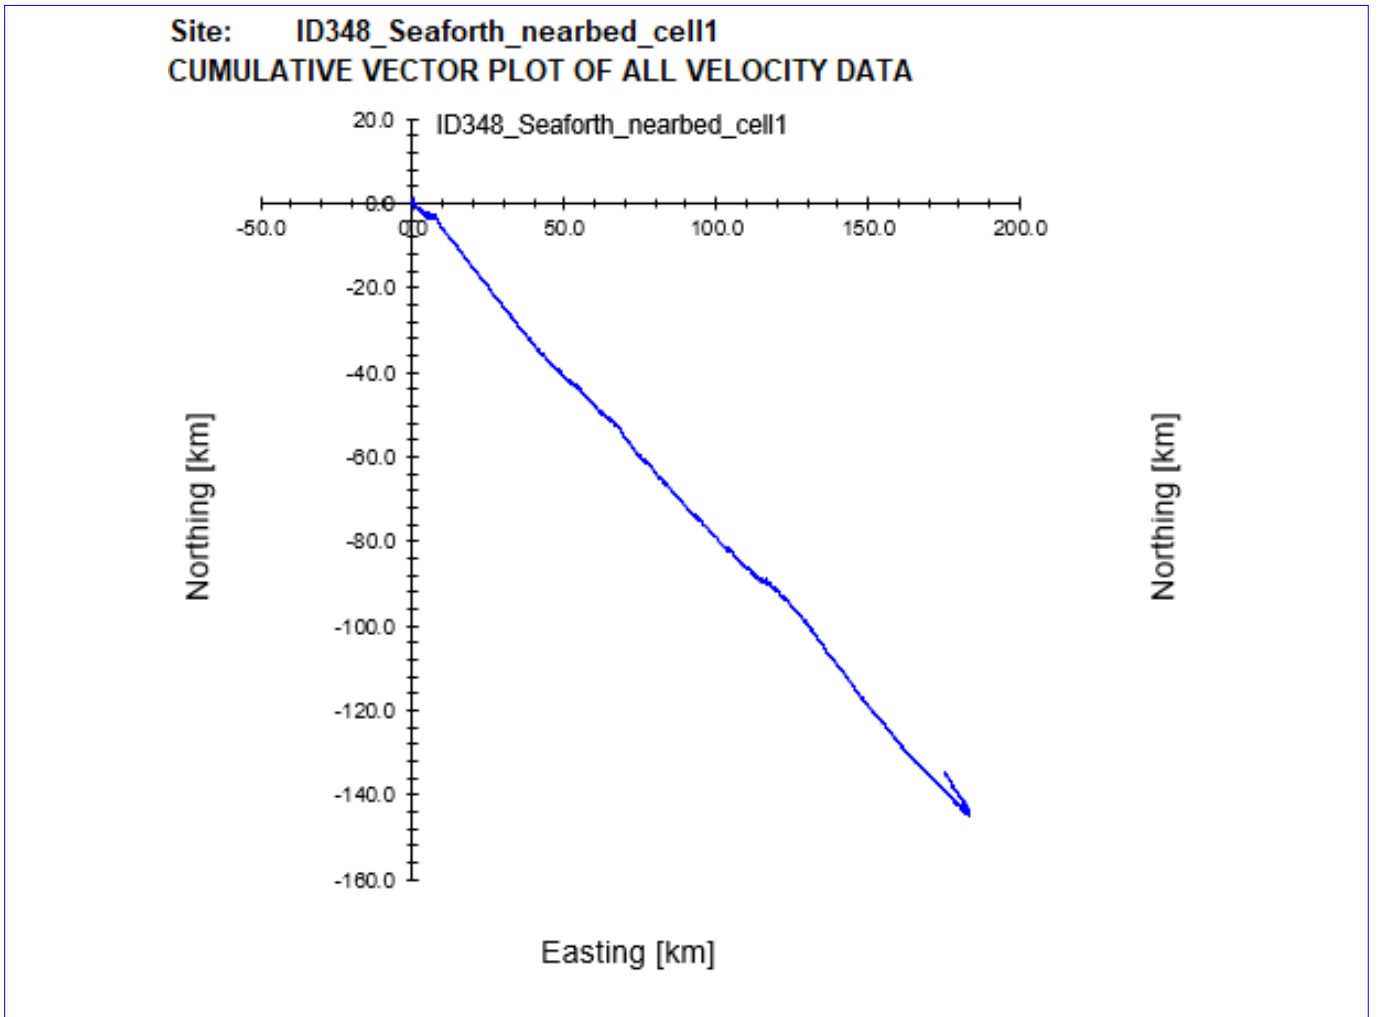


Figure 9. Cumulative Vector Plot of all velocity data from near bottom cell for ID348.

5. Summary of Current Data – ID348

Site Name: Seaforth

Data start date: 25/06/2020

Data end date: 06/09/2020

Water Depth (mean derived from pressure sensor): 109.63 m

Table 3. Summary of current meter deployment

	Cell	Depth Below Surface (m)	Distance from Seabed (m)	Mean current speed (cm/s)
Near surface	40	24.5	82.68	4.94
Cage bottom	30	44.5	62.68	4.59
Near bed	1	102.5	4.68	8.09
			Average current speed:	5.87

Table 4. Ranked percentiles for current speed at all three depths

Cell	Ranked Percentile (%) for mean speed	≤3cm/s (%)	≥4.5cm/s (%)	≥9.5cm/s (%)
Near surface	59	35	46	10
Cage bottom	57	36	44	7
Near bed	55	16	73	35

Cell	Major Axis (Deg-G)
Near surface	325
Cage Bottom	325
Near bed	135

Table 5. Mean and residual currents

	Mean Speed (m/s)	Residual Speed (m/s)	Residual Parallel (m/s)	Residual Normal (m/s)	Tidal Amplitude Parallel (m/s)	Tidal Amplitude Normal (m/s)
Near Surface	0.049	0.024	0.024	0.002	0.076	0.023
Cage Bottom	0.046	0.012	0.012	0.000	0.072	0.023
Near Bed	0.081	0.035	0.035	-0.005	0.123	0.023

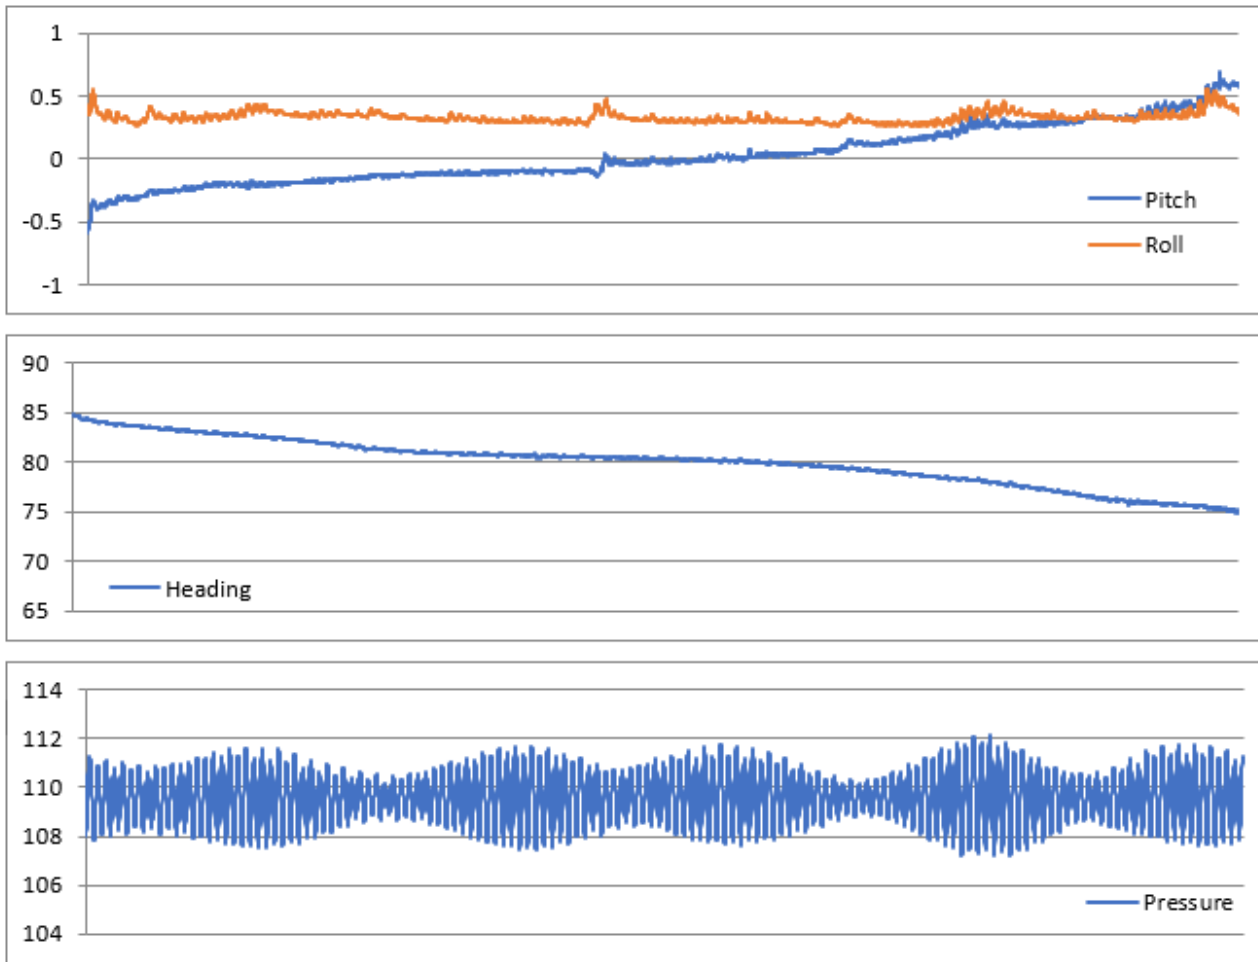


Figure 10. Summary of pitch, roll, heading & pressure data from deployment ID348.

6. Conclusion

MOWI has collected and analysed current and bathymetric data for the marine salmon farm at Seaforth. The analysed current data for the 73 days and 7 hours period are believed to be reliable and representative of the proposed location. The local-area multibeam bathymetric data gained from surveying the proposed site, combined with the wider-area UKHO bathymetry data, provided a coherent bathymetric dataset for the site.

Appendix 1. Survey Equipment Deployment Log

Sentinel V (ADCP) Current Meter Record Log

Location: Seaforth, Loch Seaforth
 Nearest tidal port: Stornoway Time zone: UTC

Deployment Details

	Time	Date
Meter switched on.	16:00:00	25/06/2020
Meter deployed.	16:00:00	25/06/2020
Meter lifted.	23:00:00	06/09/2020
Meter switched off.	23:00:00	06/09/2020
Period used for this report.	25/06/2020 16:00:00	to 06/09/2020 23:00:00

ADCP serial number: 24358
 Meter position: 57.93127N, -6.67433W
 123400E 903120N
 Minimum water depth: 107.18m (106.48m measured by ADCP + 0.7m *)
 Water depth (Chart Datum): 105.98m (minimum water depth – 1.2 m tide timetable)
 Mean water depth: 109.63m (measured by ADCP + 0.7m *)
 Depth of meter from surface: 107.17m (below mean low water spring (107.87m))
 Depth of meter from seabed: * Meter on seabed 0.7m to transducer head
 Sounding at deployment: Depth sounder unable to record >60m

ADCP meter settings:

Reference	Transducer
Bin size	2.0m
Dist to 1st bin	4.68
Number of bins	50
Frequency	307 kHz
Recording interval	20 min
No. pings per ensemble	300
Magnetic correction	0
Ensemble	1200
Standard Deviation	0.63cm/sec
Time/Ping	2 seconds