



Hydrographic Report

Fish Holm

Report To	Scottish Environmental Protection Agency
Deployment ID	N008_FishHolm_210422
Status	Version 1.2
Date	December 16, 2024

Scottish Sea Farms Ltd.
Barcaldine Hatchery
Barcaldine
Oban, Argyll
PA37 1SQ
Email modelling@scottishseafarms.com

Contents

1	Executive Summary	4
2	Introduction	5
3	Methodology	6
3.1	Data Acquisition Positioning	6
3.2	Water depth	6
3.3	Wind conditions	6
3.4	Current Profiler	6
3.4.1	Configuration parameters	6
3.4.2	Mooring system	6
3.4.3	Current Profiler Specifications	7
3.4.4	Data processing and analysis	7
3.5	Tidal Correction for Bathymetric Data	8
4	Quality Checks	9
4.1	Positioning Data	9
4.2	Bathymetric Data	9
4.3	ADCP current data	9
5	Results	10
5.1	Bathymetric Data	10
5.2	Meteorological data	10
5.3	Current data	11
6	Discussion	13
7	Conclusion	14
	References	14
8	Appendices	15
8.1	Appendix 1 - SEPA HG Analysis v7	15
8.2	Appendix 2 - Definitions and terminology	17

List of Figures

2.1	Location of survey area and ADCP deployment.	5
3.1	Example ADCP mooring system used during deployment.	7
5.1	UKHO bathymetry at Fish Holm.	10
5.2	Pitch, Roll and Heading data for duration of ADCP deployment.	11
6.1	Cumulative vector plot of current velocity for all relevant bins.	13
8.1	Near-bed HG analysis at Fish Holm.	15
8.2	Cage-bottom HG analysis at Fish Holm.	15
8.3	Sub-surface HG analysis at Fish Holm.	16

List of Tables

1.1	Summary of survey and site information.	4
3.1	Summary of ADCP settings used during deployment.	6
3.2	ADCP sensor specifications.	7
3.3	Coordinates and magnetic heading corrections.	8
5.1	Summary statistics for ADCP deployment.	12

1 Executive Summary

This report has been prepared by Scottish Sea Farms Ltd. (SSF) to meet the data collection and reporting requirements of the Scottish Environment Protection Agency (SEPA) [2] for the purpose of assessing an application to expand the marine salmon farm development at Fish Holm (existing SEPA CAR license CAR/L/1004202), as well as for assessing the environmental impact of waste and medicine treatments at said proposal through modelling. The report describes the hydrographic survey conducted to collect modelling input data for the proposed Fish Holm site, a summary of which is provided in Table 1.1 below.

Table 1.1: Summary of survey and site information.

Site Details	
Name	Fish Holm
Location	Setterness Area, Yell Sound, Shetland
Development	Proposed expansion
Average depth	66.98 m
Hydrographic Summary	
Survey Date	21/04/2022 - 25/07/2022
ADCP Location	Lat/Long (WGS 84) 60.44483°N -1.12378°W OS Grid Ref 448317E 1173770N
Equipment type	Nortek Signature ADCP 500khz

2 Introduction

This report details the hydrographic survey conducted by SSF for the purpose of collecting environmental data for NewDEPOMOD, dispersion, and hydrodynamic models to assess an application for a marine fish farm site at Fish Holm. The report describes the collection of data using an Acoustic Doppler Current Profiler (ADCP) at the proposed location of the site, located to the south east of the Fish Holm on the east coast of the Shetland Mainland (Figure 2.1). The average water depth around the proposed development is 66.98m. Data collection during this survey follows the procedures recommended in current SEPA guidance [1] [2] [3].

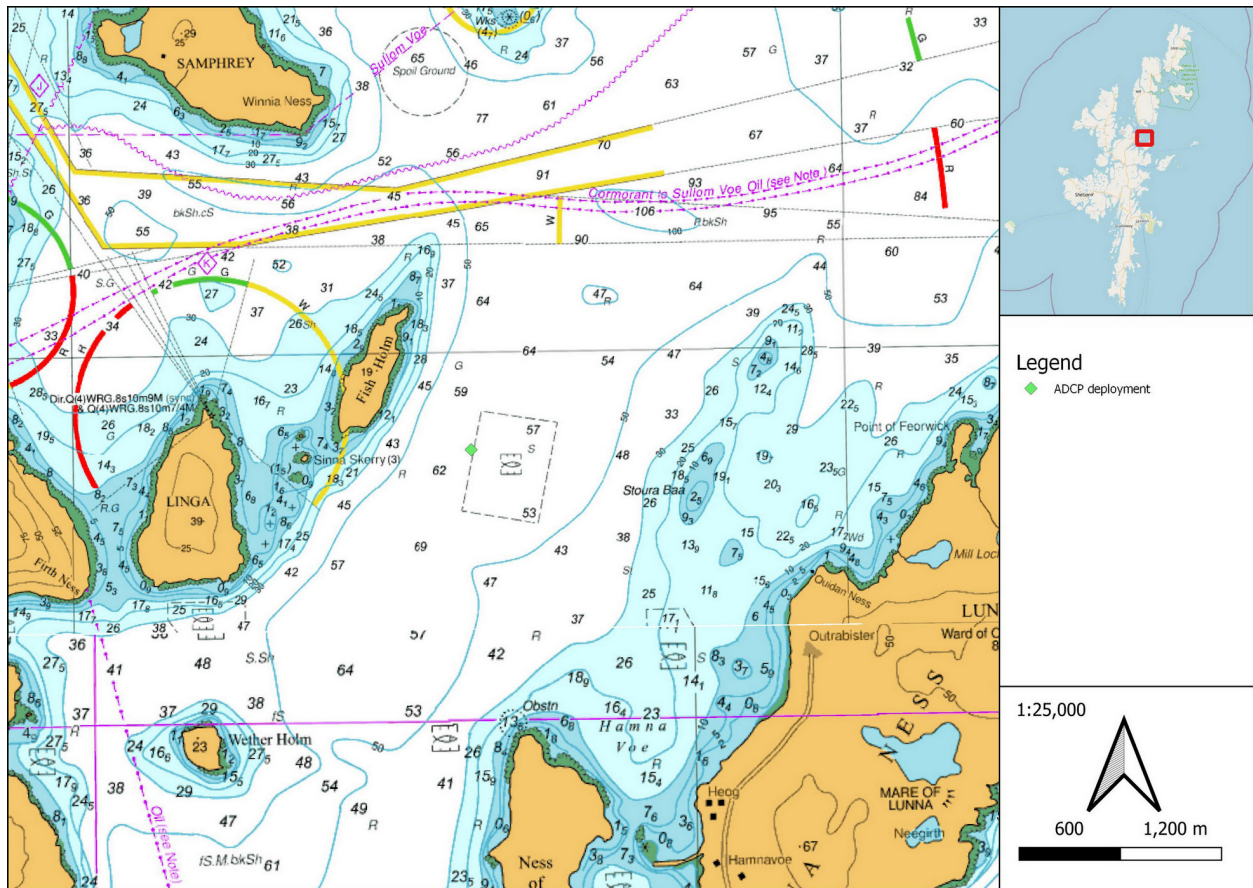


Figure 2.1: Location of survey area and ADCP deployment.

3 Methodology

3.1 Data Acquisition Positioning

A handheld GPS (Garmin GPSmap 76), set to WGS84, was used to obtain position fixes during the survey. The accuracy of the GPS unit was confirmed using the integrated GPS on board the workboat vessel used in the survey.

3.2 Water depth

The on-board echo sounder system (Garmin GPS Map XSV) was utilised to determine depth.

3.3 Wind conditions

Meteorological data was not collected during this hydrographic survey as it took place over a longer period than 90 days.

3.4 Current Profiler

3.4.1 Configuration parameters

Table 3.1 summarises the configuration settings used during the survey. To comply with SEPA guidelines the profiler must be configured to specify a precision within 10% of the mean current speed, a precision of 0.5cm/s was obtained in this instance.

Table 3.1: Summary of ADCP settings used during deployment.

Parameter	Setting	Unit
Profile interval	3600	s
Number of Bins	32	-
Bin size	1.8	m
Blanking distance	0.5	m
Depth range	66.98	m

3.4.2 Mooring system

The profiler was connected to a frame with chain leading away from it. This chain was attached to an anchor and rope leading to a surface buoy. This system ensures the surface rope does not interfere with the data obtained from the profiler. Figure 3.1 illustrates an example of the mooring system used during the survey.

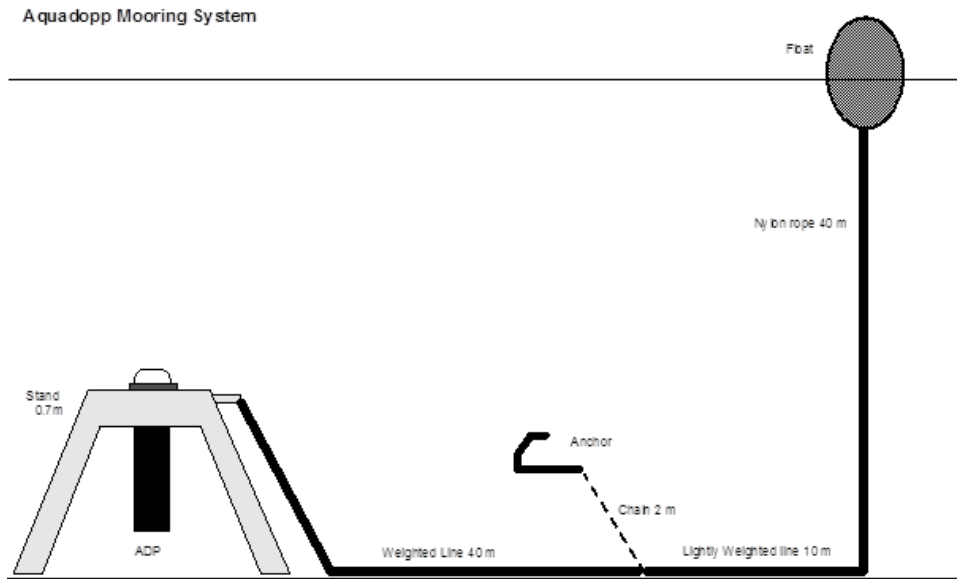


Figure 3.1: Example ADCP mooring system used during deployment.

3.4.3 Current Profiler Specifications

Table 3.2 provides a summary of the profiler sensor specifications.

Table 3.2: ADCP sensor specifications.

	Accuracy	Resolution	Range
Velocity	0.3 cm/s	0.1 cm/s	5 m/s
Pressure	0.1% FS	User configurable	100 dB
Tilt/roll	2°	0.01°	180°
Temperature	0.1°C	0.01°C	-4° to 40°C

3.4.4 Data processing and analysis

The data were retrieved from the profiler and three bins were identified to represent the near bed, the cage bottom and the sub-surface. The following relationship was used to determine the height of the bin centres from the seabed

$$\text{Bin height above bed} = ht + BD + (nBS)$$

Where ht is the height of the ADCP transducer above the bed (0.63 m), BD is the ADCP blanking distance (0.5 m), n is the bin number and BS is the bin size (1.8 m).

Near-bottom currents were recorded as close to the seabed as was practicable. A depth corresponding to the cage-bottom was chosen to represent the cage-bottom currents, and the sub-surface depth was normally retrieved from a depth approximately five metres below the mean depth during the deployment period. However, when operating the ADCP near to surface layers, special consideration must be given when analysing the resulting data. Sidelobe interference may affect the last 10% of the water column current profile. The extent to which the sidelobe interference will affect the current measurements is a function of the surface conditions, the scattering return signal strength from the water and the acoustic properties of

the transducers. Therefore, the sub-surface data was retrieved from a depth sufficient that the data was not affected by sidelobe interference or wave breaking. Depths extracted from the current profiler data records are calculated from the centre point of each bin, considering the height of the ADCP from the seabed (0.63 m) and the blanking distance (0.5m).

The time-series data were extracted from the raw data file, using Nortek's SignatureViewer software, to generate ASCII text files of sensor and derived parameters.

The magnetic direction data were corrected using data derived from the magnetic declination obtained from the British Geological Survey website and from grid convergence as calculated by the code in the OS corrections tool, as implemented in SEPA's data analysis tool; values obtained are presented in Table 3.3, below.

Table 3.3: Coordinates and magnetic heading corrections.

Date	Lat	Long	NGR_X	NGR_Y	mag. dec	grid conv.	GMA
21/04/2022	60.44483°N	1.12378°W	448317	1173770	-0.91	0.76	-1.67
Notes: positions recorded to WGS84, and converted to OSGB36 magnetic declination from BGS Geomagnetism website [4] grid convergence from OS corrections tool grid magnetic angle = magnetic declination – grid convergence							

3.5 Tidal Correction for Bathymetric Data

Tide times were obtained from software Admiralty TotalTide for the Scalloway Tidal Station.

4 Quality Checks

4.1 Positioning Data

The accuracy of the handheld GPS was checked against the boats GPS.

4.2 Bathymetric Data

Depth soundings and depth recordings from the ADCP were assessed against charts and UKHO bathymetry data for accuracy.

4.3 ADCP current data

Initial data integrity checks were made looking at heading, pitch, roll, depth and anomalous current magnitude spikes, within the Velocity software. Further checks were made of data consistency after conversion from binary to ASCII data in Microsoft Excel, and then through importing the data into SEPA's analysis tool (HGdata_analysis_v7.xls; v7.11). Final checks of the data were undertaken by SEPA before this report was written.

5 Results

5.1 Bathymetric Data

Depth soundings were obtained from UKHO bathymetry data, to confirm chart accuracy (Figure 5.1) and compare against depth sounder readings and the depth recordings from the ADCP.

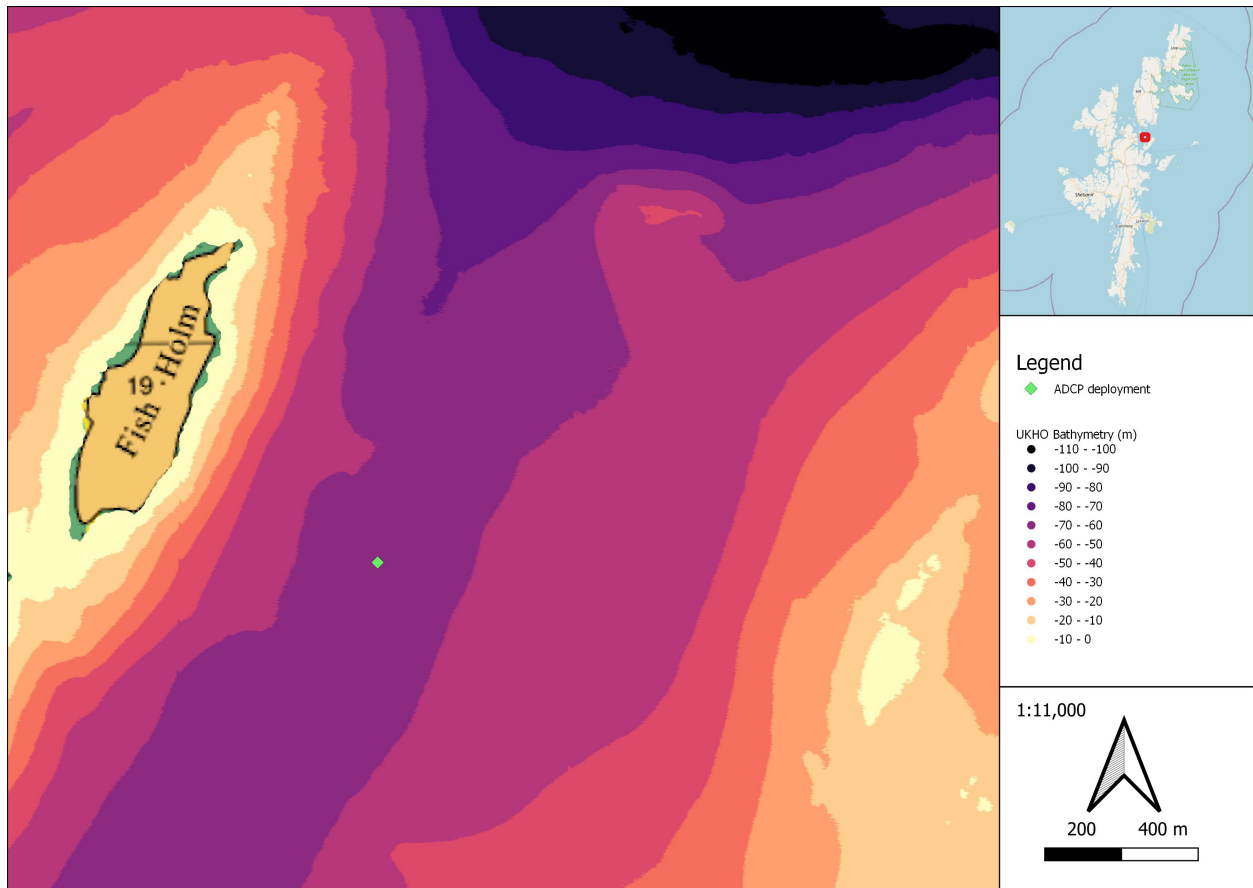


Figure 5.1: UKHO bathymetry at Fish Holm.

5.2 Meteorological data

Meteorological data was not collected during this hydrographic survey as it took place over a longer period than 90 days.

5.3 Current data

Data were obtained from all sensors (speed, direction, pressure, temperature, heading, pitch and roll) for a 95-day period between 21/04/2022 to 25/07/2022.

The signal strength data indicates that no objects such as creels and mooring lines interfered with profiler recording.

The pitch and roll data shows that the profiler was upright and within the manufacturer's recommendation of a maximum range of 20° (Figure 5.2)

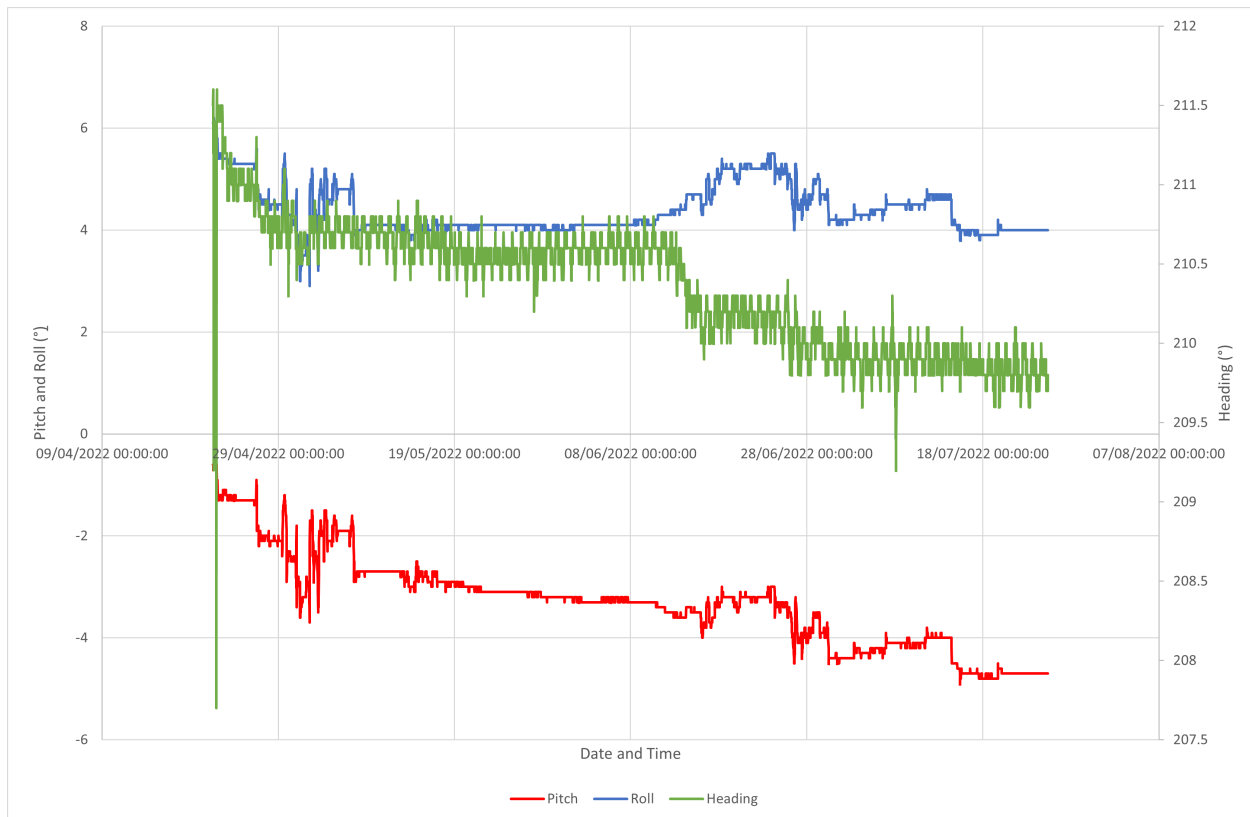


Figure 5.2: Pitch, Roll and Heading data for duration of ADCP deployment.

Table 5.1 summarises the statistics obtained through the SEPA HG analysis v7 Excel templates (Appendix 1).

Table 5.1: Summary statistics for ADCP deployment.

Bin height	Sub-surface Bin 32 (58.73 m from seabed)	Cage-bottom Bin 26 (47.93 m from seabed)	Near-bed Bin 1 (2.93 m from seabed)
Mean Speed (m s^{-1})	0.162	0.166	0.154
Mean Speed Ranked %	56	55	55
3 cm s^{-1} Ranked %	3	2	3
4.5 cm s^{-1} Ranked %	6	5	6
9.5 cm s^{-1} Ranked %	25	23	24
Residual Direction ($^{\circ}\text{Grid}$)	355	346	310
Residual Speed (m s^{-1})	0.073	0.06	0.052
Longitudinal Residual (m s^{-1})	0.072	0.059	0.043
Lateral Residual (m s^{-1})	-0.013	-0.014	-0.030
Longitudinal Amplitude (m s^{-1})	0.196	0.211	0.193
Lateral Amplitude (m s^{-1})	0.139	0.140	0.132
Ellipse Major Axis ($^{\circ}\text{Grid}$)	5	360	345
Amplitude Anisotropy	1.41	1.51	1.46

6 Discussion

UKHO Bathymetric data confirmed Admiralty Charts are accurate in the area. Data was combined and interpolated onto a regular 25m, 2km x 2km grid for use in NewDEPOMOD.

All three components of the data have strong tidal components, with the sub-surface data having the strongest. The mean current speeds suggest that current speed through the water column is fairly consistent, with only slightly lower current speed found at the near-bed bin. Tide in the area appears to be particularly prevalent in a N direction at sub-surface level, NW at cage-bottom and W at near-bed as shown by the cumulative velocity vector plot (Figure 6.1), with this indicating flow comes from the east and south of the site, towards Lunna.

At the near-bed cell, 24% data were below the SEPA resuspension threshold of 9.5 cm s^{-1} . This suggests that a large proportion of deposited solid waste from the site will be resuspended and transported away from its initial deposition position; what movement there may be is likely to be to the west, as evidenced in the cumulative vector plot (Figure 6.1).

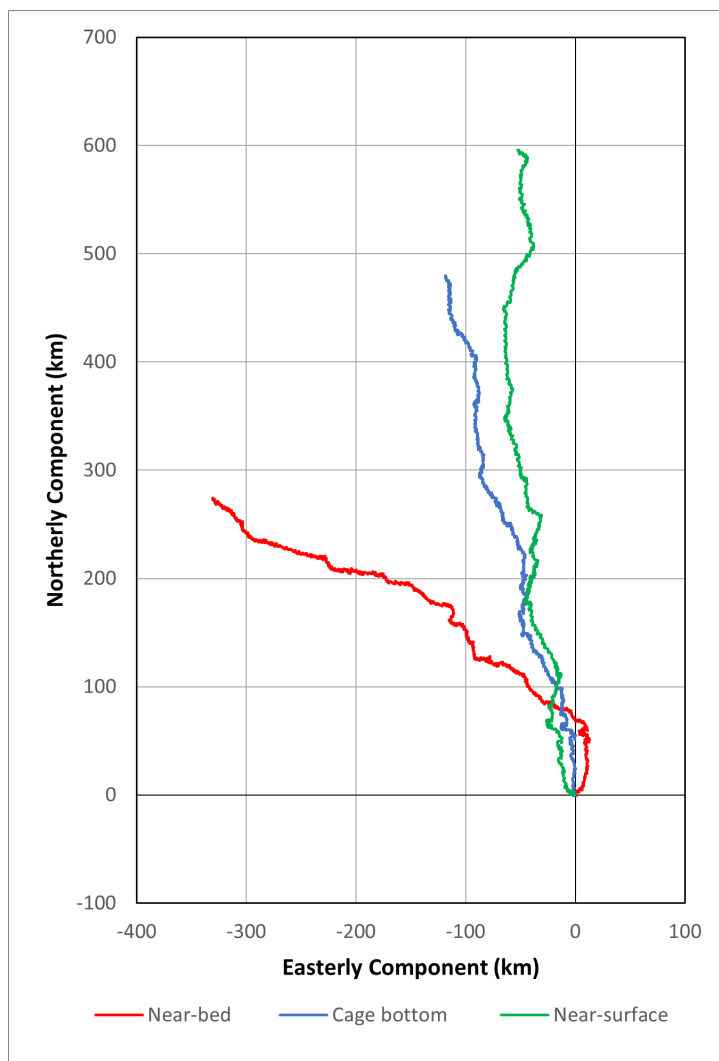


Figure 6.1: Cumulative vector plot of current velocity for all relevant bins.

7 Conclusion

Examination of the collected current data suggests that the data is of sufficient accuracy and quality to be used as a measure of flow conditions around the Fish Holm site and subsequent use for NewDEPOMOD and marine modelling purposes.

References

- [1] SEPA. *Aquaculture Modelling: Regulatory Modelling Guidance for the Aquaculture Sector*. Tech. rep. 2019.
- [2] SEPA. *Aquaculture Modelling: Regulatory Modelling Process and Reporting Guidance for the Aquaculture Sector Scope of Report*. Tech. rep. 2019.
- [3] SEPA. “Hydrographic Data for Aquaculture Applications (published January 2024)”. In: (2024).
- [4] *World Magnetic Model Calculator*. URL: https://geomag.bgs.ac.uk/data_service/models_compass/wmm_calc.html.

Company Address	Laurel House, Laurelhill Business Park, Stirling, Scotland FK7 9JQ
Company Reg No.	00958001
Date	December 16, 2024
Revision No.	1.2

Copyright Scottish Sea Farms Ltd.

All rights reserved. The copyright of this document rests with Scottish Sea Farms Ltd; no citation from it, in whole or in part, or information derived from it, may be published, copied or reproduced without prior written consent from Scottish Sea Farms Ltd. and ensuring that the source material and Scottish Sea Farms Ltd. are acknowledged.

8 Appendices

8.1 Appendix 1 - SEPA HG Analysis v7

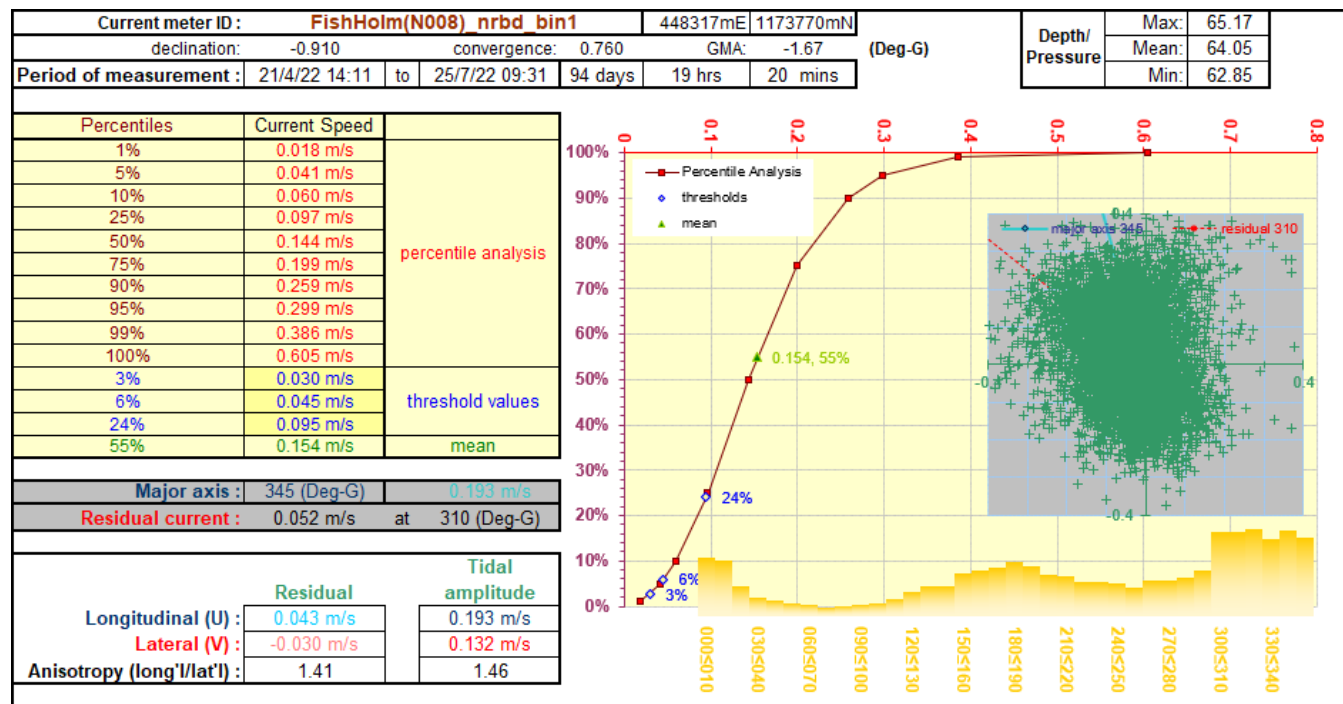


Figure 8.1: Near-bed HG analysis at Fish Holm.

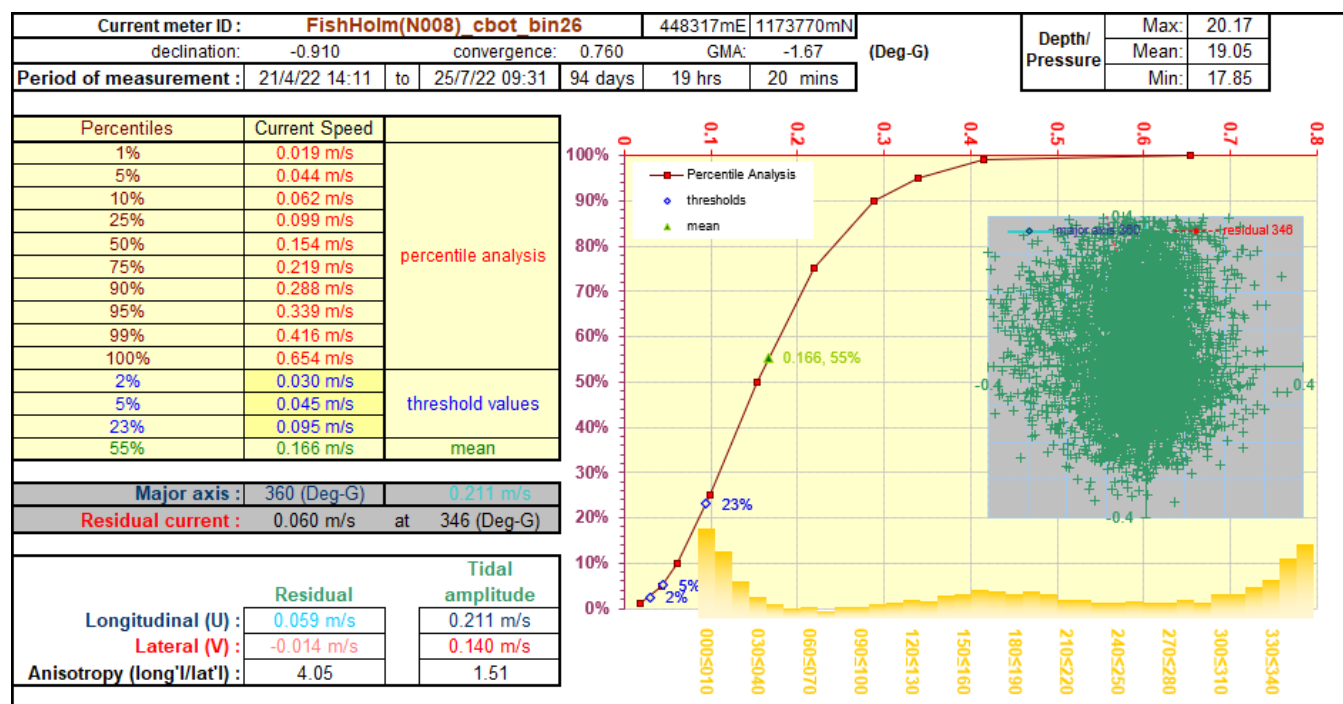


Figure 8.2: Cage-bottom HG analysis at Fish Holm.

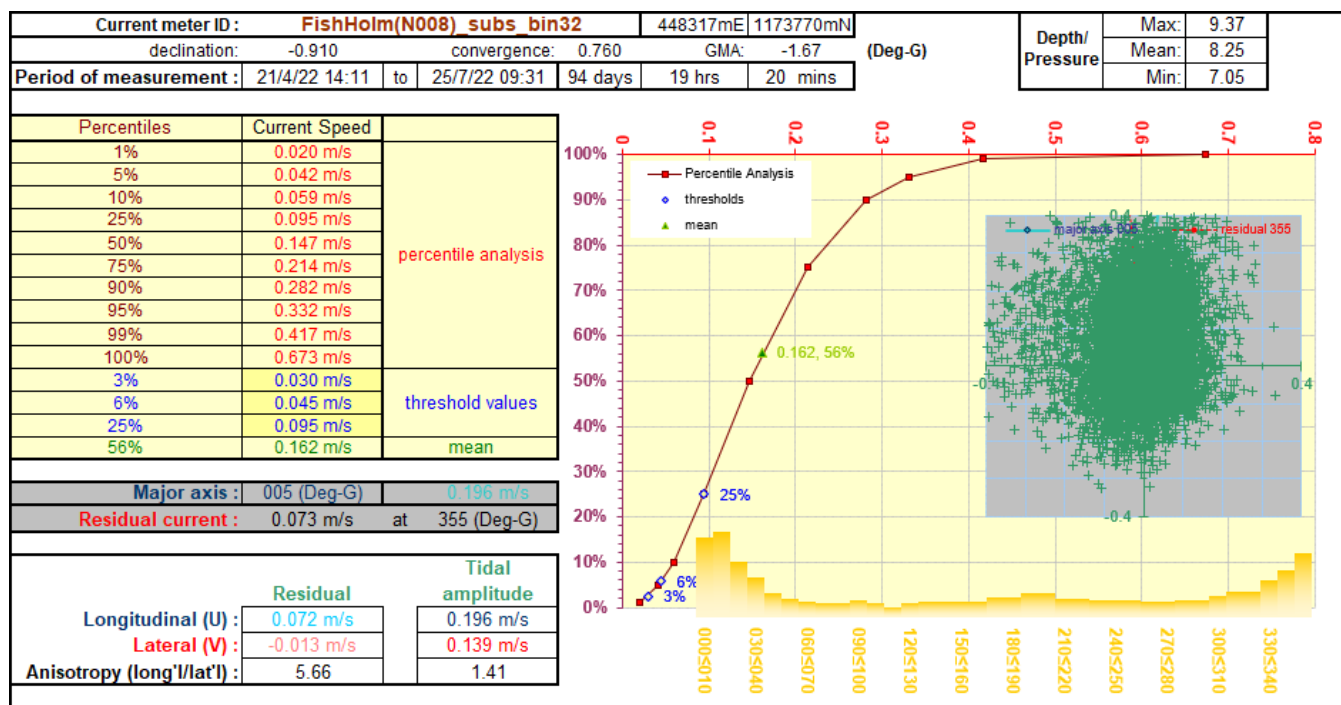


Figure 8.3: Sub-surface HG analysis at Fish Holm.

8.2 Appendix 2 - Definitions and terminology

Averaging interval – the period, in seconds, over which the NDP averages data before computing a mean velocity profile.

Profile interval – the time between sequential profiles, in seconds. This is given as the time from the start of one profile to the start of the next profile, and must be greater than or equal to the averaging interval (or averaging interval will take precedence).

Temperature mode – Temperature mode refers to the source of temperature data used for sound speed calculations. USER indicates that the value input in the set-up parameters should be used; MEASURED indicates that the value reported by the NDP temperature sensor should be used. The temperature sensor used by the NDP is considered to be sufficiently reliable and accurate for sound speed calculations, thus MEASURED is the more common choice. Note that sound speed is recorded with each profile.

Number of Bins – number of bins to collect per profile. The maximum number of bins with accurate velocity data will vary with system frequency, bin size, and deployment conditions. Bin size (m) – vertical length of each bin.

Blanking distance (m) – the vertical distance from the ADP transducers to the start of the first bin. There is a minimum value required for each frequency to avoid interference in the first bin.

Co-ordinate system – this determines in what coordinate system the velocity profile data will be stored. BEAM gives velocity data as along beam velocities. XYZ gives velocity data in a Cartesian coordinate system relative to ADP orientation. ENU (for East-North-Up) reports data in an instrument independent Earth coordinate system.

Velocity precision – this is a theoretical estimate of the accuracy of current speed measurements based upon the acoustic frequency of the ADP, bin size and averaging interval.

Dyer (1979) Equation - The Dyer Equation is used to find the bed shear velocity and can be used to calculate the current velocity at any depth (z).

$$U^* = KU(z)Ln(z/z_0)$$

Where U^* = is the bed shear velocity, $K= 0.4$ the von Karman Constant $z_0= 2 \times 10^{-4}$, m = bottom roughness length z = sampling depth and $U(z)$ = current speed at depth z